

RF transfer

HF-U-USB2.0-AF-AF-2-SF

Item 43488



GO TO PRODUCT

ingun[®]




Partner for Future Technology

- EMC-compliant radio-frequency transfers for connecting highly sensitive PCBs to the measuring system, from and into the shielding area
- Interference-free transmission of USB signals

Application

The radio-frequency transfer is used to transfer USB signals from and to the radio-frequency chamber. The USB 2.0 transfer is filtered.

INGUN SELECTION

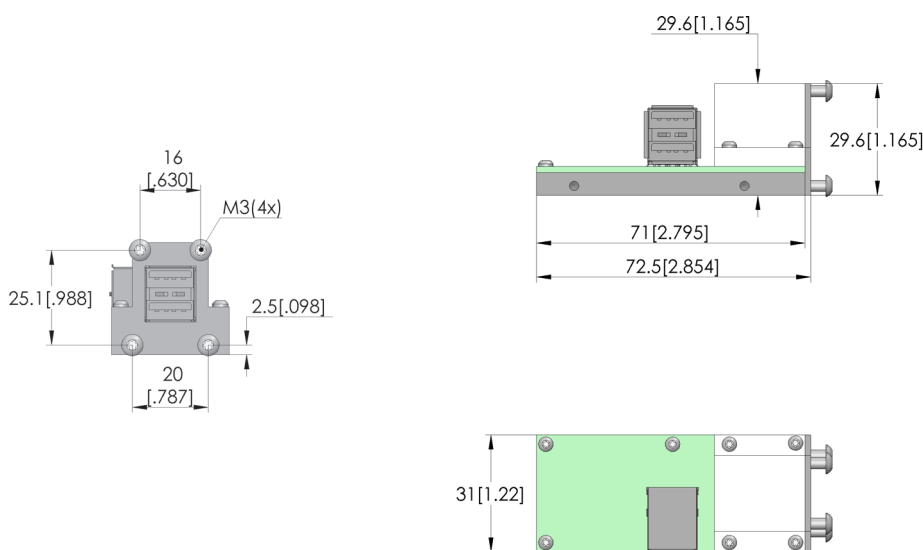

General data

Product group:
Series:
Type:
Version:
Accessory type:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

RF accessories
HF-U
RF transfer
USBA 2.0 filter
Customising accessories
31 mm [1.22 in]
29.6 mm [1.16 in]
0.05 kg [.11 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes



Compatible with

Exchangeable kits version:
MA exchangeable kits (ATS MA):

HF
ATS MAxx/HF/AL/ESD

Technical data

Connection: USB 2.0 plug
Max. current: .5 A
Max. voltage: 10 VDC
Number of poles: 2
Gross data rate: .5 Gbit/s
Length: 71 mm [2.79 in]
Outer dimensionS (WxDxH): 31 x 71 x 29.6 mm [1.22 x 2.79 x 1.16 in]

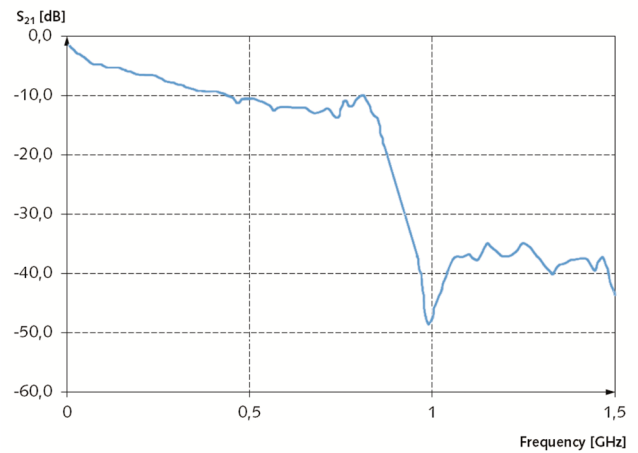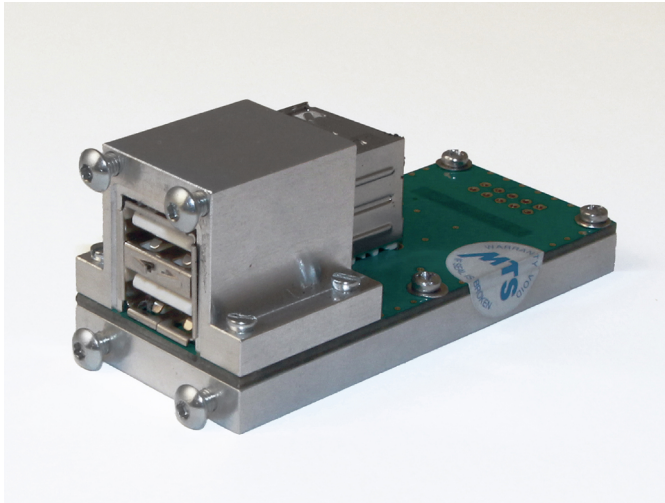

Technical information	
Designation	Version
Filter	LC circuit
Attenuation (1 - 6 GHz)	> 30 dB (typical)
Data rate max.	480 Mbit/s

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

