

Interface block

SB-P-LL-045-DM2,3

Item 29448



ingun[®]

Partner for Future Technology


- Equipped with INGUN contact terminals
- Suitable for test fixtures with internal or external Pylon interface
- High contact reliability and transmission quality
- Reliable transmission of fibre optic signals within the scope of the specification

Application

Interface blocks (SB) are used to reliably transmit signals between test device and test system in internal and external Pylon interfaces. Fibre optic blocks are suitable for the reliable transmission of fibre optic signals within the scope of their specification. They are primarily used for testing light-emitting components such as LEDs.



Signal transmission

The signal is transmitted via two opposing interface blocks, which are designed for a working distance of 15.1 ± 0.5 mm between their mounting surfaces.

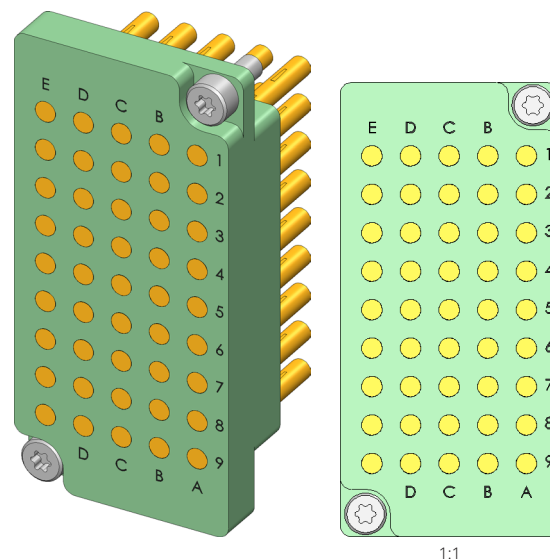

Delivery

The block is delivered fully equipped and ready for the installation of fibre optic cables and including installation accessories.

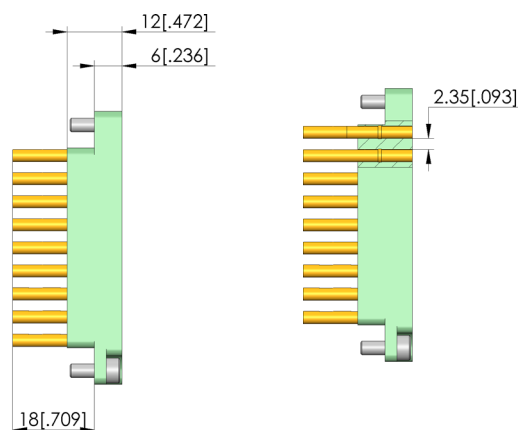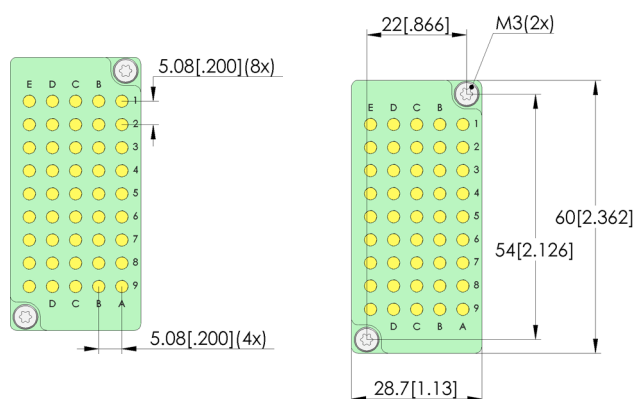

General data

Product group:	Interface blocks (SB)
Series:	SB-LL
Type:	Fibre optic block
Version:	Device under test (DUT) side
Accessory type:	Customising accessories
Component assembly:	KS-00435G-K
Weight:	0.029 kg [.063 lbs]
Min. temperature:	-30 °C [-22 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Compatible with

Compatible mating part 1:
Compatible mating part 2:
MA exchangeable kits (ATS MA):

SB-T-LL-020-OH3-K
SB-T-LL-045-DM2,3-K
ATS MAxx

Technical data

Working distance:	15,1 +/- 0,5 mm
Connection:	Receptacle
Sealing:	EDPM rubber
Number of poles:	45 (fixed positions)
Fibre optic cladding diameter:	2.3 mm [.09 in]
Fibre optic core diameter:	1.5 mm [.059 in]

Interface block

SB-P-LL-045-DM2,3

Item 29448



ingun[®]

Partner for Future Technology

Fibre optic cable

Part no.	Designation	Version
39910	LL-2,3-1,5	Fibre optic cable DM = 2.3 mm

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB