


Test plug PS-HDMI-019

Item 34814



ingun[®]
Partner for Future Technology

- Precise, low-wear contacting of HDMI plug connectors
- Reliable data transmission with original data rate
- Outstanding service life, up to 100,000 cycles under optimal conditions, depending on the version.
- Signal transmission via original connector plug or solder connection, depending on the variant
- Installation via floating mount recommended
- Optional spring elements (112863: set of 2) can compensate for tolerances of ± 0.4 mm and positioning inaccuracies of 2° .

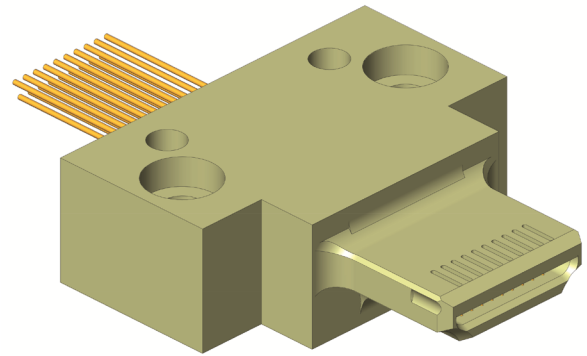

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-HDMI
DUT / contact:	HDMI-A
DUT interface gender :	F signal conductor female / socket
Width:	30 mm [1.18 in]
Min. temperature:	-80 °C [-112 °F]
Max. temperature:	150 °C [302 °F]
RoHS-compliant:	Yes

Inner conductor data

Inner conductor tip style material:	3 CuBe
Inner conductor max. current load capacity:	1 A
Number of inner conductor poles:	19

Mechanical data

Total length:	30 mm [1.18 in]
Installation height without receptacle:	30 mm [1.18 in]


Test plug PS-HDMI-019

Item 34814



ingun[®]

Partner for Future Technology

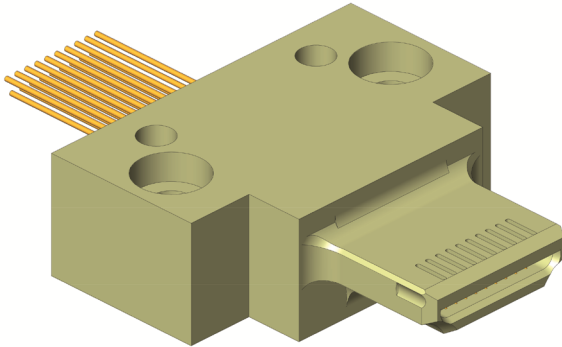

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
Test probes

