

Receptacle

KS-550 E08 V-30

Item KS-550E08V-30




GO TO PRODUCT

ingun[®]

Partner for Future Technology



1:1

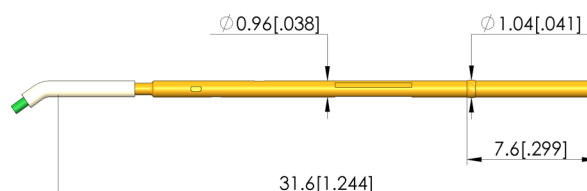

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-550
KS-550 press-in version
Pre-wired
Yes
Gold
1.05 mm [.041 in]
7.6 mm [.299 in]
No
yes (< 1 ccm / min)
Yes

Wiring data

Wire type AWG:
Wire type:
Insulating material:
Wire outer diameter:
Wire length:
Wire diameter:
Wire colour:
Kink protection:

30 type 2
Solid
Tefzel
0.5 mm [.019 in]
1,000 mm [39.3 in]
0.25 mm [.009 in]
Green
Yes

Mechanical data

Total length:
Outer diameter:

31.6 mm [1.24 in]
0.95 mm [.037 in]

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:
Mounting hole with press ring in CEM1:
Mounting hole with press ring in FR4:

0.96 – 0.98 mm [.037 – .038 in]
0.97 – 0.99 mm [.038 – .038 in]
0.96 – 0.98 mm [.037 – .038 in]
0.97 – 0.99 mm [.038 – .038 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes

