

Interface support

SSA-VPC-G20X-RS-VA4060

Item 115833



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Interface support für VIRGINIA Panel G20x-RS interface
- Ideally designed for VA 4060 test fixtures
- Quick, easy installation on the back of the test fixture
- Reliable connection from test fixture to system interface

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

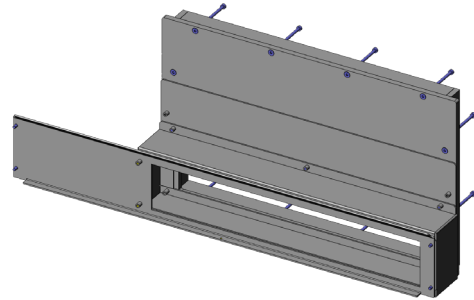

General data

Product group:	Housing
Series:	SSA-VAxxxx
Type:	VPC-G20x-RS (Virginia Panel)
Version:	VA 4060
Accessory type:	Additional function
Scope of delivery:	Unassembled
Width:	98 mm [3.85 in]
Height:	271 mm [10.6 in]
Weight:	2.9 kg [6.39 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):
Accessories:

VA 4060
SST-VPC-G20X-RS

Technical data

Length: 645 mm [25.3 in]
Outer dimensionS (WxDxH): 645 x 98 x 271 mm [25.3 x 3.85 x 10.6 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test fixture kits

