

# Rigid Contact Probe

## UKS-051 201 051 A


Item UKS-051201051A



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

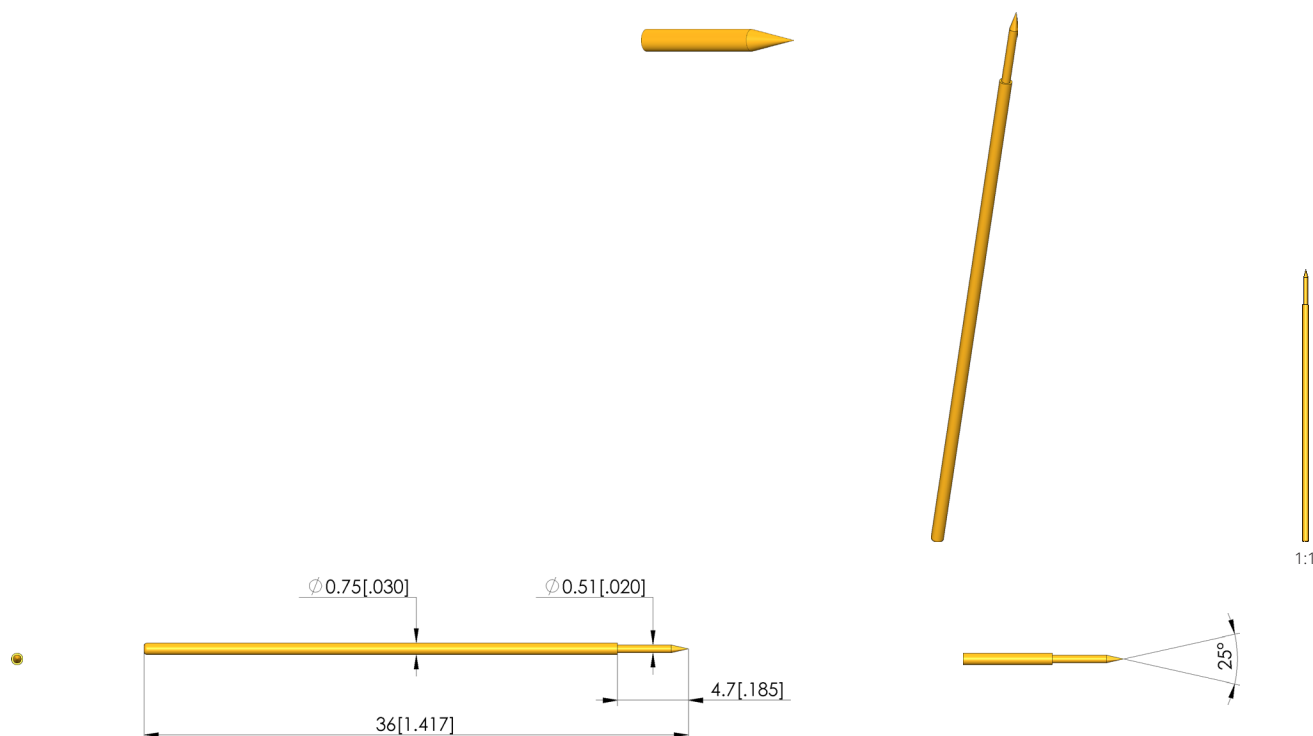

### General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	RF inner conductor
Series:	UKS-051
Grid:	1.27 mm [50 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	-100 °C [-148 °F]
Max. temperature:	200 °C [392 °F]
RoHS-compliant:	Yes

### Tip style data

Tip style:	01 30° needle tip, self-cleaning
Tip diameter:	0.51 mm [.02 in]
Tip style surface:	A gold
Tip style material:	2 steel

### Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	20 mOhm

### Mechanical data

Total length:	36 mm [1.41 in]
Barrel diameter:	0.75 mm [.029 in]
Maximum stroke:	0 mm [0 in]
Spring pre-load:	0 N [0 ozf]
Collar height:	00
Spring force at working stroke:	0 N [0 ozf]
Recommended working stroke:	0 mm [0 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB

Learn more about  
**Test probes**

