




GO TO PRODUCT

INGUN SELECTION



1:1

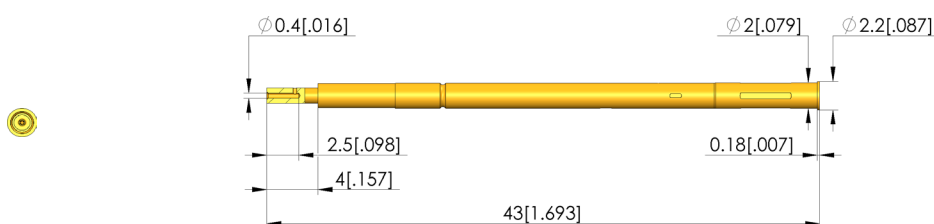

General data

Product group:	Receptacles (KS)
Series:	KS-215
Sub-series:	KS-215 S press-in version Schnellwechselsystem
Type of receptacle connection:	Plug / open
Press ring:	No
Surface area:	Gold
Collar diameter:	2.2 mm [.086 in]
Collar height:	0.2 mm [.007 in]
Knurl:	No
Vacuum-tight:	No
RoHS-compliant:	Yes

Mechanical data

Total length:	43 mm [1.69 in]
Outer diameter:	2 mm [.079 in]

Mounting hole

Mounting hole in CEM1:	1.98 – 2 mm [.077 – .078 in]
Mounting hole in FR4:	1.99 – 2.01 mm [.078 – .079 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test probes

