

Interface

SST-VPC-G20X

Item 113497



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- VIRGINIA PANEL VPC-G20x interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the back of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the back of the test fixture using a suitable interface frame.

Delivery

The interface is unpopulated upon delivery.

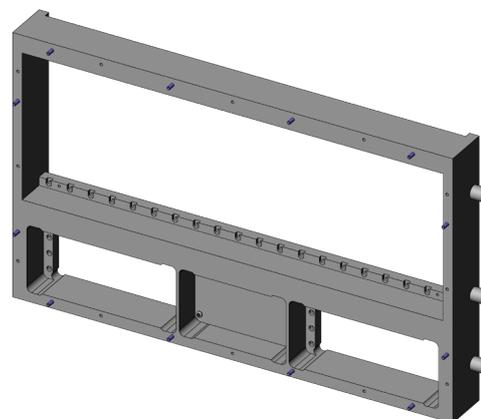

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Virginia Panel Corporation
Version:	VPC-G20x
Accessory type:	Additional function
Scope of delivery:	Unpopulated, 28 free slots
Width:	44.5 mm [1.75 in]
Height:	257 mm [10.1 in]
Weight:	2.95 kg [6.5 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx14
Vacuum test fixtures (VA):	4060
Accessories:	SSA-VPC-G20X

Technical data

Length:	452 mm [17.8 in]
Outer dimensionS (WxDxH):	452 x 44.5 x 257 mm [17.8 x 1.75 x 10.1 in]

Interface supports

Part no.	Designation	Version
115667	SSA-VPC-G20X-MAxx12	Suitable to manual test fixtures MA xx12
115674	SSA-VPC-G20X-MAxx13	Suitable to manual test fixtures MA xx13
115676	SSA-VPC-G20X-MAxx14	Suitable to manual test fixtures MA xx14
115677	SSA-VPC-G20X-VA4030	Suitable to vacuum test fixtures VA 4030
115679	SSA-VPC-G20X-VA4040	Suitable to vacuum test fixtures VA 4040
115678	SSA-VPC-G20X-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

