Push rod

NHS-ST-55,6-6,0-KU-AL-ESD

Item 23505

GO TO PRODUCT

ingun®
Partner for Future Technology

- Trusted push rods for reliable, rigid fixing of the PCB in the probe field against the force of the test probes
- Robust, pressure-resistant design
- Quick, easy installation

Application

Push rods (NHS) are used in customisations to securely hold electronic circuit boards in place against the force of the test probes during contacting in the test fixture. Push rods are mounted in the pressure frame plate.

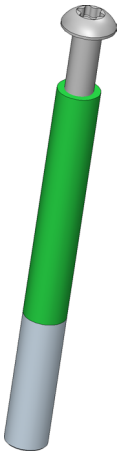

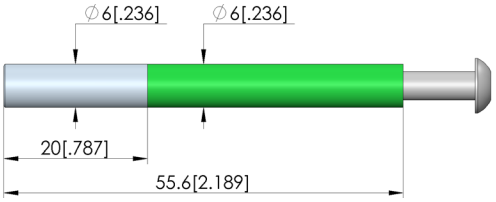



General data

Product group:	Push rods (NHS)
Series:	NHS-ST
Type:	Rigid
Version:	ESD (
Accessory type:	Customising accessories
Outer dimensions (TxL):	6 x 55.6 mm [.236 x 2.18 in]
Colour:	Green

Mechanical data

Total length:	55.6 mm [2.18 in]

Technical data

Tip diameter:	6 mm [.236 in]
Pushrod shaft diameter:	6 mm [.236 in]
Tip material:	KU
Shaft material:	AL
True running:	2768 mK
Installation:	Screwed in
Thread:	M4x10 mm
Tip length:	20 mm [.787 in]

Compatible with

Vacuum test fixtures (VA):	VA 3xxx, VA 2xxx

HUBER+SUHNER Ingun GmbH
Max-Stromeyer-Straße 160
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 11/26_GB