

Battery contacting probe

BCP-113 314 230 A 5002

Item BCP-113-0006





GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Contacting solution for prismatic and cylindrical cells such as 18600, 21700 and 46xx as well as coin cells
- Current rating upto 8A on Al DUT with temperature rise $dT \leq 20$ K ; max. current rating of 25A on high conducting materials like copper alloys
- Designed for a range of cell contacting applications such as formation, AC-IR, open circuit voltage (OCV) measurement and end-of-life (EOL) testing
- Low-resistance contact probe with R_i typical < 10 m Ω

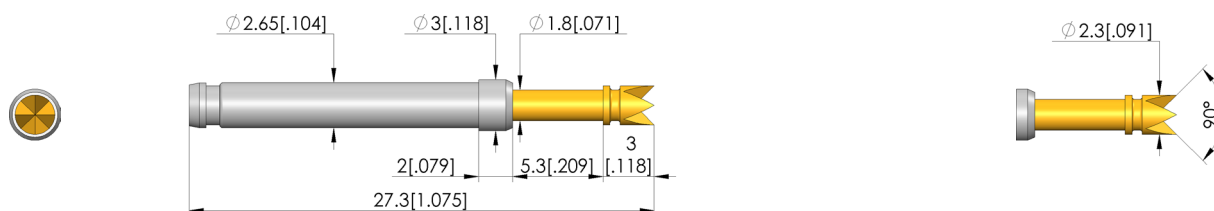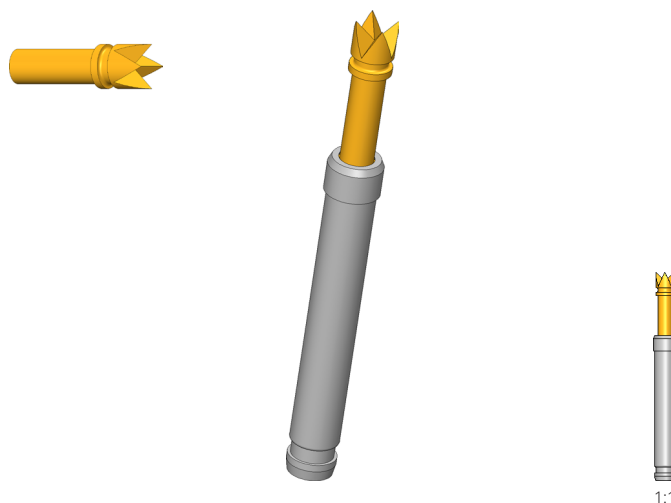

General data

Product group:	Battery Contacting
Sub-product group:	Standard BCP (press-in)
Series:	BCP-113
Application rec.:	
Grid:	4 mm [157 mil]
DUT / contact:	
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-113
Min. temperature:	-100 °C [-148 °F]
Max. temperature:	200 °C [392 °F]
RoHS-compliant:	Yes

Electrical data

Current load capacity / rated current:	25 A
Rated current on copper @ $\Delta T \leq 20$ K:	15 A
Rated current on copper @ $\Delta T \leq 60$ K:	25 A
Rated current on aluminium @ $\Delta T \leq 20$ K:	8 A
Rated current on aluminium @ $\Delta T \leq 60$ K:	15 A
Typical resistance (R_i):	10 mOhm

Mechanical data

Total length:	27.3 mm [1.07 in]
Barrel diameter:	2.65 mm [.104 in]
Maximum stroke:	5.3 mm [.208 in]
Spring pre-load:	2.22 N [7.98 ozf]
Collar height:	02
Spring force at working stroke:	5 N [17.9 ozf]
Recommended working stroke:	4 mm [.157 in]

Tip style data

Tip style:	14 4-point crown, self-cleaning
Tip diameter:	2.3 mm [.09 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Battery contacting probe

BCP-113 314 230 A 5002


Item BCP-113-0006



GO TO PRODUCT

ingun[®]

Partner for Future Technology

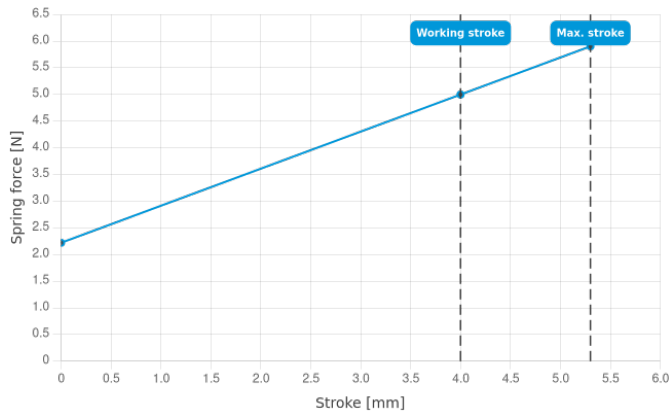

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test probes

