


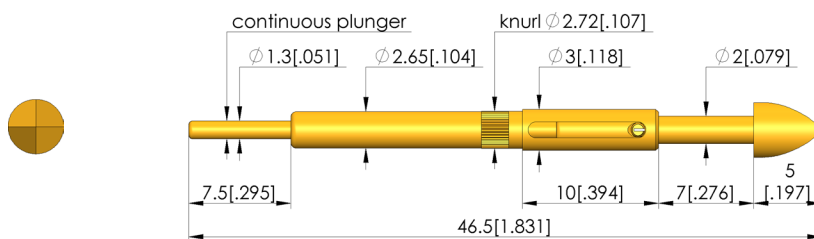




Durchgangsprüfung

Zur Überprüfung von möglichen offenen Verbindungen, Kurzschlüssen und Fehlverdrahtungen



General data

Product group:	Screw-in test probe
Sub-product group:	Non-rotating test probes
Series:	GKS-714
Grid:	5.08 mm [200 mil]
Contacting from:	Flat contact
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Type of test probe connection:	Plug
Adjustable installation height:	No
Non-rotating:	Yes
Continuous plunger:	$\phi 1,3 \times 7,5$
Compatible connector(s):	SE-503
Compatible receptacle(s):	KS-714 23
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	22 crown, 2 points, self-cleaning
Tip diameter:	4 mm [.157 in]
Tip style surface:	A gold
Tip style material:	2 steel

Electrical data

Current load capacity / rated current:	8 A
Typical resistance (Ri):	30 mOhm

Mechanical data

Total length:	46.5 mm [1.83 in]
Barrel diameter:	2.65 mm [.104 in]
Maximum stroke:	5 mm [.196 in]
Spring pre-load:	1.25 N [4.49 ozf]
Collar height:	10
Spring force at working stroke:	5 N [17.9 ozf]
Recommended working stroke:	4 mm [.157 in]

Test Probe


GKS-714 222 400 A 5010

Item GKS-714-0028



ingun[®]

Partner for Future Technology

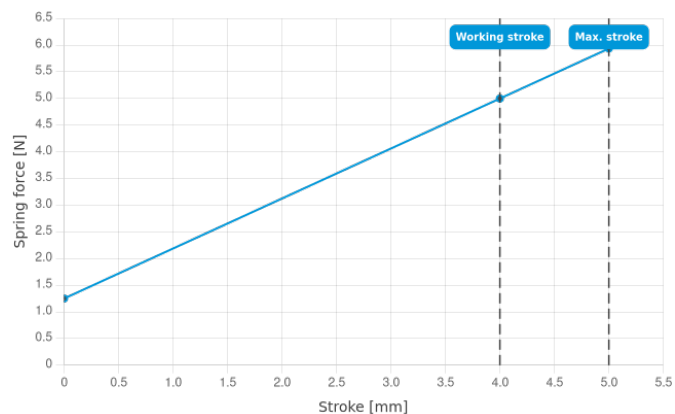

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com