

# Contact terminal

## KT-S-050 67 23

Item KT-S050-0002



GO TO PRODUCT

ingun®



Partner for Future Technology

- Use of larger test probes for increased contacting accuracy and longer service life
- Compatible with existing socketless systems
- Variable installation height allows for optimal consideration of different test point levels

NEW



1:1

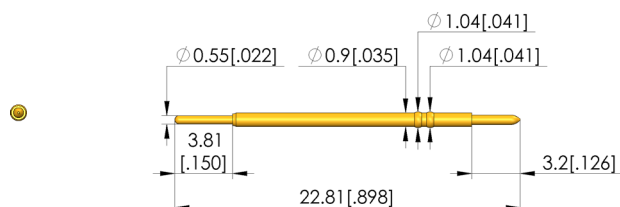

### General data

Product group:

Series:

Sub-series:

Grid:

Type of contact terminal connection:

Magnetic:

Installation type:

Quick-exchange system:

Surface area:

Knurl:

RoHS-compliant:

Contact terminals (KT)

KT-S050

KT-S050 standard

1.27 mm [50 mil]

Wireless

Yes

Press-in

No

A gold

No

Yes

### Tip style data

Tip diameter:

0.64 mm [.025 in]

### Mechanical data

Total length:

22.8 mm [.898 in]

Shaft diameter:

0.9 mm [.035 in]

Latching lug:

No

### Mounting hole

Mounting hole in CEM1:

0.97 – 0.99 mm [.038 – .038 in]

Mounting hole in FR4:

0.97 – 0.99 mm [.038 – .038 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB

Learn more about  
Test probes



ingun.com