





GO TO PRODUCT

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Version with central beading ensure low wobble for contacting small test points
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



1:1

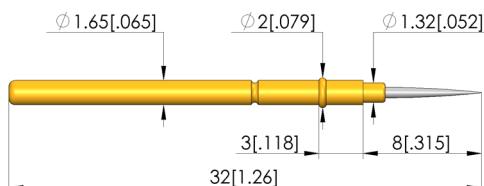

#### General data

Product group: ICT / FCT (in-circuit test and function test)  
 Sub-product group: Metric standard  
 Series: GKS-912  
 Grid: 2.54 mm [100 mil]  
 Contacting from: Pad  
 Magnetic: Yes  
 Installation type: Plug-in  
 Quick-exchange system: Yes  
 Adjustable installation height: No  
 Non-rotating: No  
 Compatible receptacle(s): KS-112  
 Min. temperature: -40 °C [-40 °F]  
 Max. temperature: 80 °C [176 °F]  
 RoHS-compliant: Yes

#### Tip style data

Tip style: 09 flexi-needle, self-cleaning  
 Tip diameter: 0.7 mm [.027 in]  
 Tip style surface: N nickel  
 Tip style material: 2 steel

#### Electrical data

Current load capacity / rated current: 5 A  
 Typical resistance (R<sub>i</sub>): 20 mOhm

#### Mechanical data

Total length: 32 mm [1.25 in]  
 Barrel diameter: 1.66 mm [.065 in]  
 Maximum stroke: 5 mm [.196 in]  
 Spring pre-load: 0.86 N [3.09 ozf]  
 Collar height: 03  
 Spring force at working stroke: 3 N [10.7 ozf]  
 Recommended working stroke: 4 mm [.157 in]

Test Probe

**GKS-912 209 070 N 3003**


Item GKS-912-0221



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

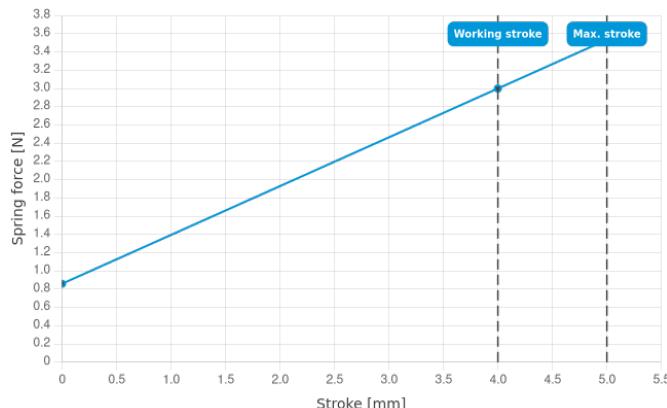

**INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

2 / 2

Learn more about  
ICT/FCT Test probes



[ingun.com](http://ingun.com)

ICT/FCT TEST PROBES