

# Interface

## SST-KMFT

Item 113853



**ingun**<sup>®</sup>

Partner for Future Technology


- REINHARDT KMFT interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the back of the test fixture using a compatible interface

### Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the back of the test fixture using a suitable interface frame.

### Delivery

The interface is unpopulated upon delivery.

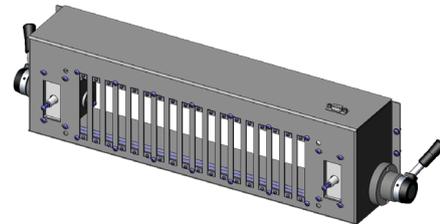

### General data

Product group:	Fixture interfaces
Series:	SST
Type:	Reinhardt
Version:	KMFT
Accessory type:	Additional function
Scope of delivery:	Unpopulated, max. 18x 96-pole VG
Max. interface signals:	1728
Width:	100 mm [3.93 in]
Height:	153 mm [6.02 in]
Weight:	4.9 kg [10.8 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

### Compatible with

Manual test fixtures (MA):	MA xx12
Vacuum test fixtures (VA):	VA 4040
Accessories:	SSA-KMFT

### Technical data

Length:	520 mm [20.4 in]
Outer dimensionS (WxDxH):	520 x 100 x 153 mm [20.4 x 3.93 x 6.02 in]


# Interface SST-KMFT

Item 113853



**ingun**<sup>®</sup>

Partner for Future Technology

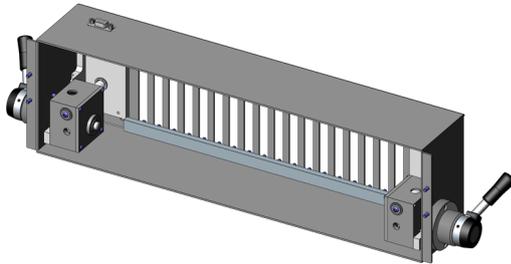

## Accessories

Part no.	Designation	Version
Interface supports		
114999	SSA-KMFT-MAxx12	Suitable to manual test fixtures MA xx12
114090	SSA-KMFT-MAxx13	Suitable to manual test fixtures MA xx13
113551	SSA-KMFT-VA4040	Suitable to vacuum test fixtures VA 4040
Connector		
4864	STV-VG64ac-M-WW-G13	VG-multipoint, C, straight, 64 poles, Wire-wrap post
5195	STV-VG96abc-M-WW-G13	VG-multipoint, C, straight, 96 poles, Wire-wrap post

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB