





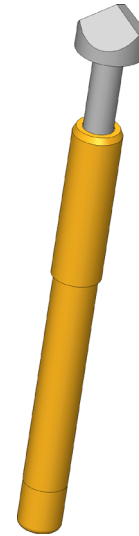


GO TO PRODUCT

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



1:1

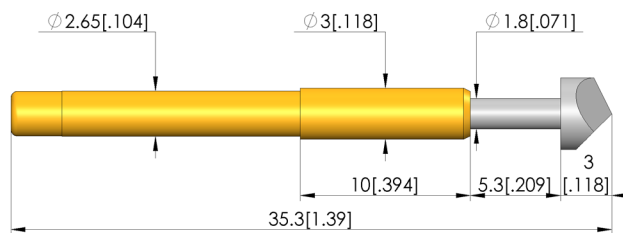

General data

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Metric standard
 Series: GKS-113
 Grid: 4.5 mm [177 mil]
 Contacting from:
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-113
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)
 Metric standard
 GKS-113
 4.5 mm [177 mil]

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

07 90° 3-edged chisel, self-cleaning
 4.2 mm [.165 in]
 R rhodium
 3 CuBe

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

5 A
 30 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

35.3 mm [1.38 in]
 2.65 mm [.104 in]
 5.3 mm [.208 in]
 0.21 N [.755 ozf]
 10
 0.6 N [2.15 ozf]
 4 mm [.157 in]

Test Probe


GKS-113 307 420 R 0610

Item GKS-113-1049



ingun[®]

Partner for Future Technology

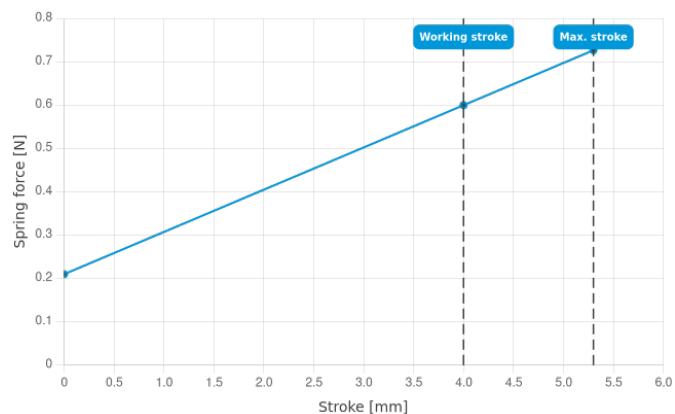

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
ICT/FCT Test probes



[ingun.com](https://www.ingun.com)

ICT/FCT TEST PROBES