

Interface

SST-MTS300

Item 17969



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- Digitaltest (Sigma) MTS 300 interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the bottom of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the bottom of the test fixture using a suitable interface frame.

Delivery

The interface is unpopulated upon delivery.

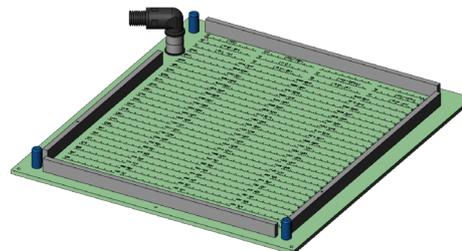

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Digitaltest (Sigma)
Version:	MTS 300
Accessory type:	Additional function
Scope of delivery:	Unpopulated, max. 3488 KT-158
Max. interface signals:	3456
Width:	439 mm [17.2 in]
Height:	79.7 mm [3.13 in]
Weight:	3.1 kg [6.83 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx13
Vacuum test fixtures (VA):	VA 4060
Accessories:	SSA-MTS300

Technical data

Length:	480 mm [18.8 in]
Outer dimensionS (WxDxH):	439 x 480 x 79.7 mm [17.2 x 18.8 x 3.13 in]

Interface


SST-MTS300

Item 17969



ingun[®]

Partner for Future Technology

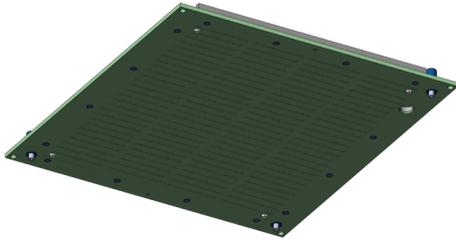

Interface supports

Part no.	Designation	Version
114045	SSA-MTS300-MAxx13	Suitable to manual test fixtures MA xx13
113535	SSA-MTS300-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB