

Pre-centering pin

VZ-R-12-22-K-X

Item 42295



GO TO PRODUCT

ingun[®]


Partner for Future Technology

- Trusted pre-centring for positioning the PCB on the probe field
- HFS-802 H-MTD Kontaktstifte

Application




Pre-centring pins (VZ) are mounted onto the moving plate, and are used as insertion aids to pre-position DUTs simply and quickly on the probe field.

INGUN SELECTION

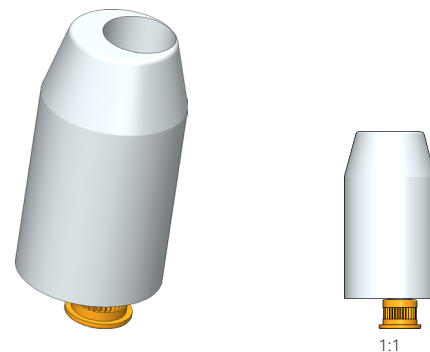

1:1

1.3[.051]

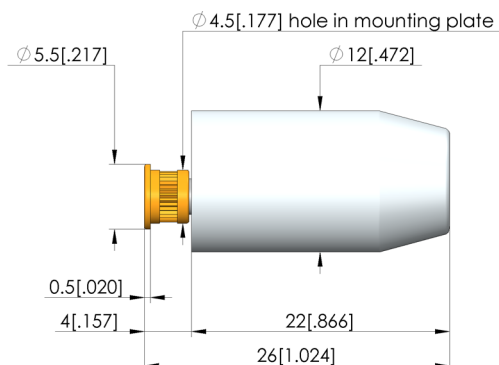

General data

Product group:

Series:

Type:

Version:

Accessory type:

Material:

Colour:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Pre-centering pins

VZ

Pre-centring pin, round, eccentric

Not ESD compliant

Customising accessories

POM

White

0.01 kg [.022 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Exchangeable kits version:

Manual test fixtures (MA):

Vacuum test fixtures (VA):

MA exchangeable kits (ATS MA):

VA exchangeable kits (ATS VA):

PA exchangeable kits (ATS PA):

Interchangeable kits (WS):

For dual-stage contacting:

No limitations

MA 2012

VA xxxx

ATS MAxx

ATS VINxxx

ATS PAZxxx

WS

Yes

Technical data

Installation:

Length:

Diameter:

Thread bush M3

22 mm [.866 in]

12 mm [.472 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB