

# Test Probe GKS-912 003 230 A 1505

Item GKS-912-2001





GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Version with central beading ensure low wobble for contacting small test points
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



1:1

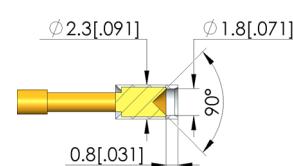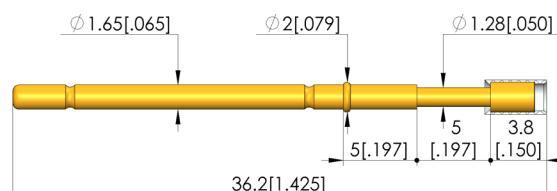

## General data

Product group: ICT / FCT (in-circuit test and function test)  
Sub-product group: Metric standard  
Series: GKS-912  
Grid: 2.54 mm [100 mil]  
Contacting from: Post  
Magnetic: Yes  
Installation type: Plug-in  
Quick-exchange system: Yes  
Adjustable installation height: No  
Non-rotating: No  
Compatible receptacle(s): KS-112  
Min. temperature: -40 °C [-40 °F]  
Max. temperature: 80 °C [176 °F]  
RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)

Metric standard

GKS-912

2.54 mm [100 mil]

Post

Yes

Plug-in

Yes

Quick-exchange system:

No

Adjustable installation height:

No

Non-rotating:

No

Compatible receptacle(s):

KS-112

-40 °C [-40 °F]

80 °C [176 °F]

Yes

## Tip style data

Tip style: 003 inverse cone, outer-ø insulated  
Tip diameter: 2.3 mm [.09 in]  
Tip style surface: A gold  
Tip style material: 0 plastic

003 inverse cone, outer-ø insulated

2.3 mm [.09 in]

A gold

0 plastic

## Electrical data

Current load capacity / rated current: 5 A  
Typical resistance (R<sub>t</sub>): 20 mOhm

## Mechanical data

Total length: 36.2 mm [1.42 in]  
Barrel diameter: 1.66 mm [.065 in]  
Maximum stroke: 5 mm [.196 in]  
Spring pre-load: 0.5 N [1.79 ozf]  
Collar height: 05  
Spring force at working stroke: 1.5 N [5.39 ozf]  
Recommended working stroke: 4 mm [.157 in]


# Test Probe GKS-912 003 230 A 1505

Item GKS-912-2001



GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology

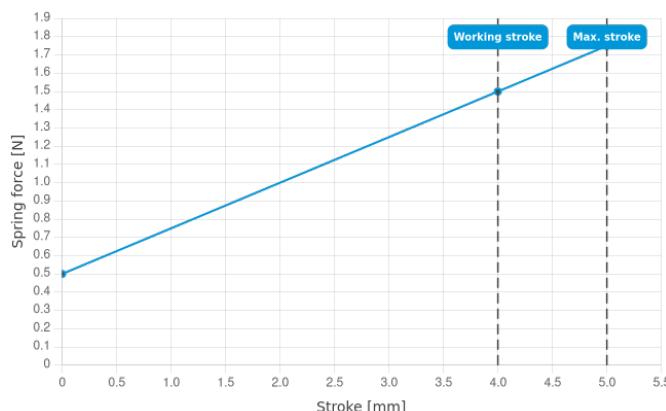

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

2 / 2

Learn more about  
ICT/FCT Test probes



[ingun.com](http://ingun.com)