







GO TO PRODUCT

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. spring forces.

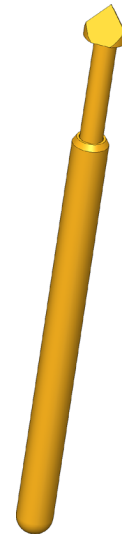

1:1

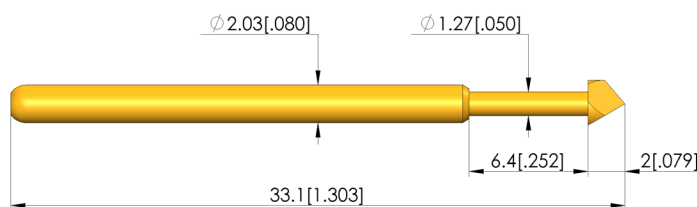

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

ICT / FCT (in-circuit test and function test)
Short/robust GKS
GKS-003
3.18 mm [125 mil]

Yes
Plug-in
Yes
No
No
KS-003
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

07 90° 3-edged chisel, self-cleaning
2.54 mm [.1 in]
A gold
3 CuBe

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

8 A
20 mOhm

Mechanical data

Total length: 33.1 mm [1.3 in]
Barrel diameter: 2.03 mm [.079 in]
Maximum stroke: 6.35 mm [.25 in]
Spring pre-load: 0.85 N [3.05 ozf]
Collar height: 00
Spring force at working stroke: 2 N [7.19 ozf]
Recommended working stroke: 4.4 mm [.173 in]

Test Probe


GKS-003 307 254 A 2000

Item GKS-003-0030



ingun[®]

Partner for Future Technology

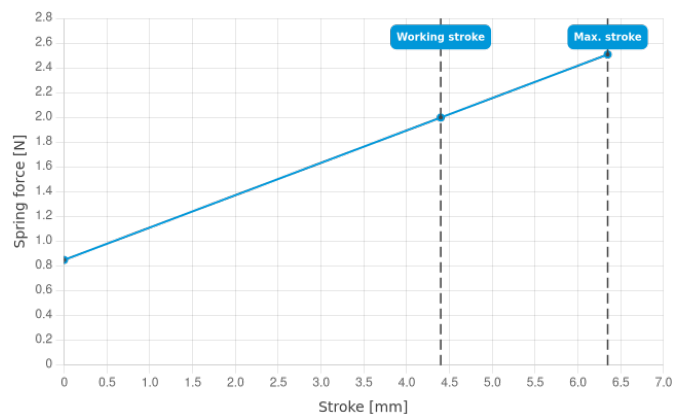

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com