

Cable plug assembly, coaxial

SE-EF178-50MCXMG080SMAMG

Item SE-EF178-0008




GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

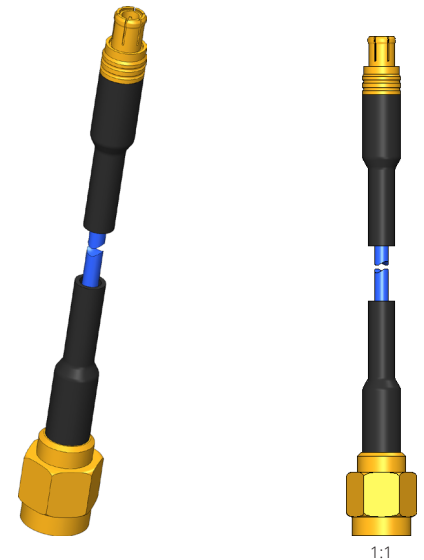

1:1

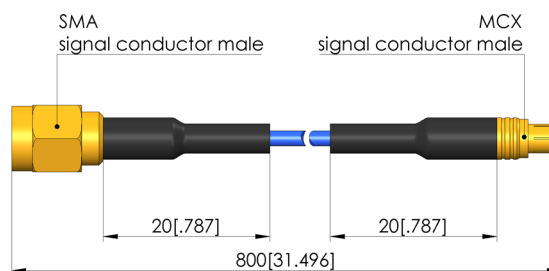

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Assemblies
SE-EF178
SE-EF178 plug
-40 °C [-40 °F]
105 °C [221 °F]
Yes

Electrical data

Maximum frequency:
Impedance:
Cable shielding:
Maximum performance:
Performance coefficient:
Dielectric strength:
Attenuation coefficient a:
Attenuation coefficient b:

3 GHz
50 Ohm
Simple
35 W
60 EF178
.75 kV
1,40670 EF178
0,22290 EF178

Cable data

Cable length:
Cable type:
Kink protection cable:
Attenuation Fmax:

800 mm [31.4 in]

Shrink-on sleeve, black, 20 mm
2.48 dB

Connector data

Interface 1:
Interface gender 1:
Version 1:
Interface 2:
Interface gender 2:
Version 2:
Moment interface 2:

MCX
M signal conductor male / plug
Straight
SMA
M signal conductor male / plug
Straight
45 cNm [3.98 lbf·in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

PLUG AND CABLE