



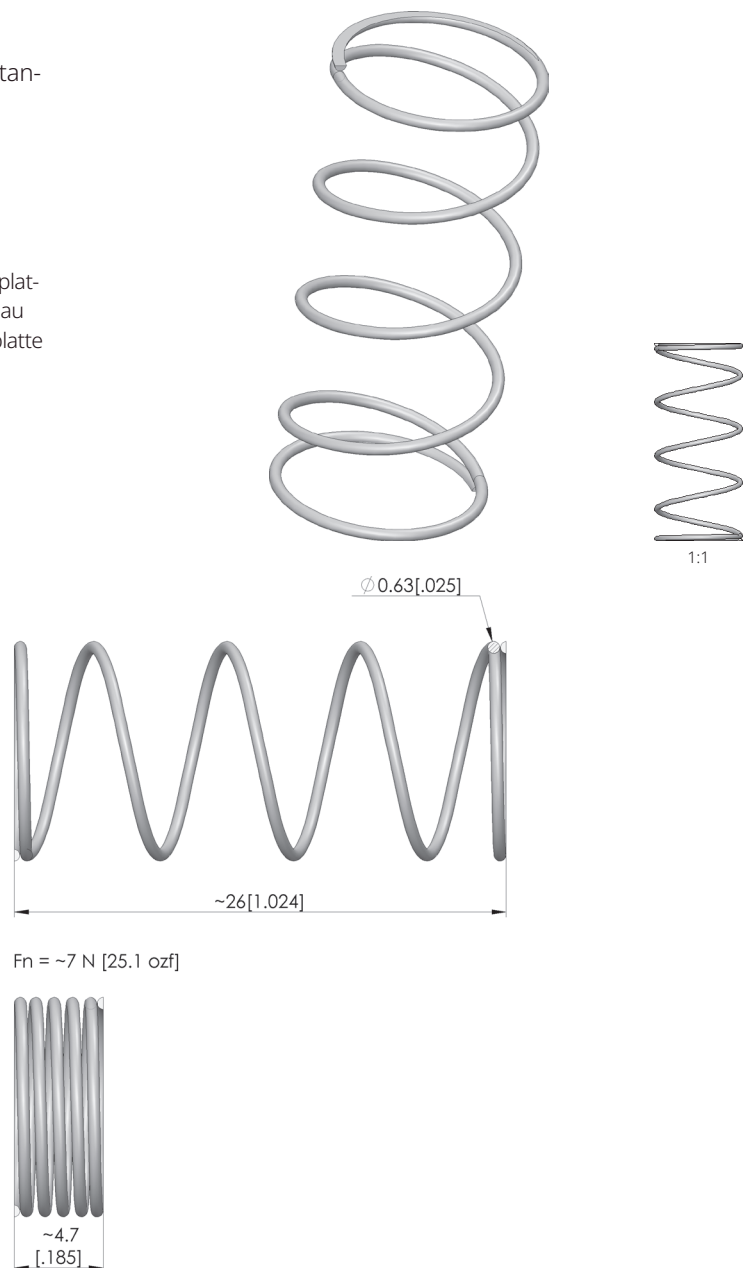

- Bewährte, rechts gewickelte, Druckfeder
- Highest spring steel quality for maximum breakage resistance
- Gleichbleibende, konstante Steigung
- Lineare Federkennlinie

Application

Federn (FED) werden als Druckelement verwendet, um die Andruckplatte mit dem Prüfling, nach der Kontaktierung auf das Ursprungsniveau zurück zu heben. Sie werden typischerweise auf der Kontaktträgerplatte montiert.



pressure spring

FED-11,6-26,0-08N-04,7

Item 1584



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:

Series:

Type:

Version:

Accessory type:

Material:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Pressure springs

FED

Pressure spring

Customising accessories

EN 10270-1-DH

26 mm [1.02 in]

0.01 kg [.022 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

PA exchangeable kits (ATS PA):

Interchangeable kits (WS):

ATS PAZ215

Technical data

Force:

Length:

Diameter:

8 N [28.7 ozf]

4.7 mm [.185 in]

11.6 mm [.456 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB