


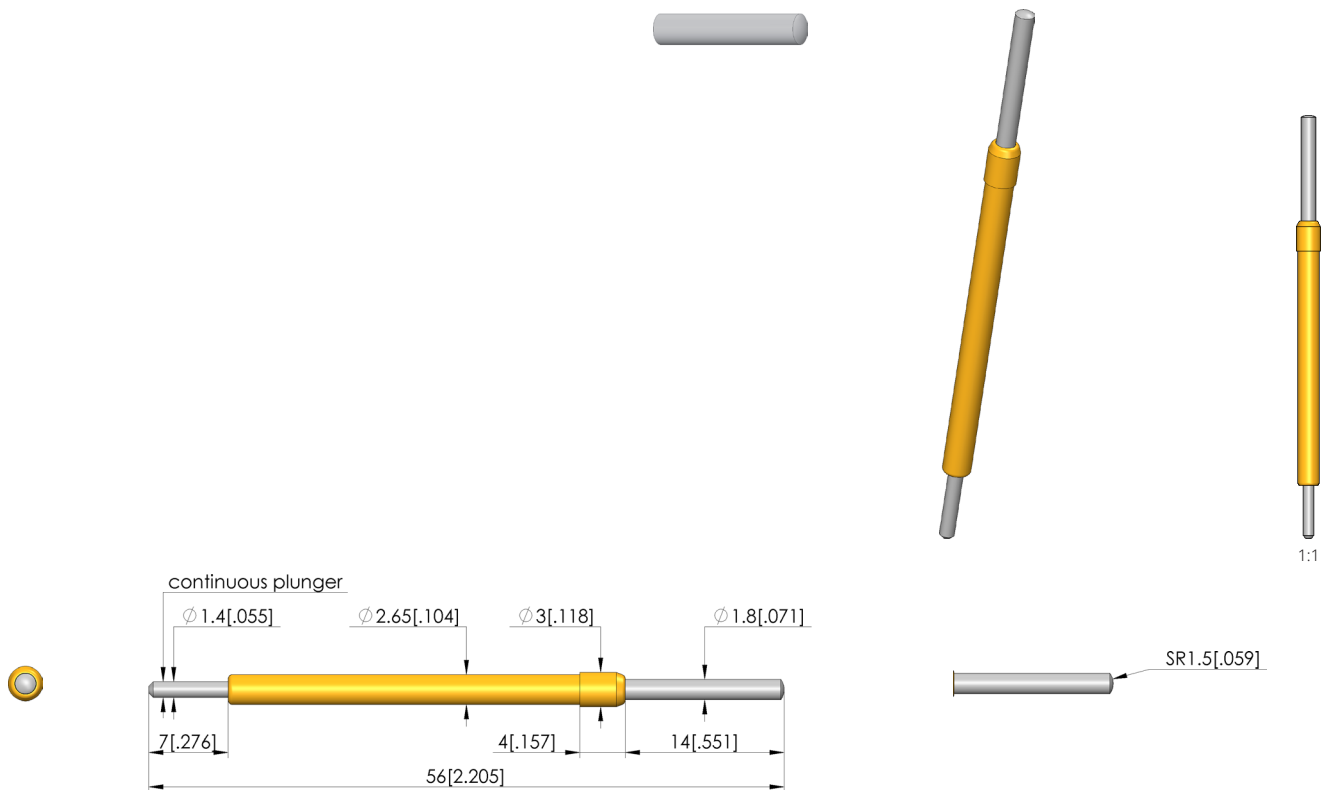

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Type of test probe connection:
Adjustable installation height:
Non-rotating:
Continuous plunger:
Compatible connector(s):
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Accessories (GKS / ADA)
PCB support pins
GKS-504
4 mm [157 mil]
Pad
Yes
Plug-in
No
Plug
No
No
ø1,4 x 7,0
SE-503
KS-113
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

05 bullet-nosed (full radius)
1.8 mm [.07 in]
N nickel
3 CuBe

Electrical data

Current load capacity / rated current:
Current rating, connection on plunger:
Typical resistance (Ri):

8 A
15 A
30 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

56 mm [2.2 in]
2.65 mm [.104 in]
14 mm [.551 in]
1.05 N [3.77 ozf]
04
3 N [10.7 ozf]
11.2 mm [.44 in]

Test Probe


GKS-504 305 180 N 3004

Item GKS-504-0005



ingun[®]

Partner for Future Technology

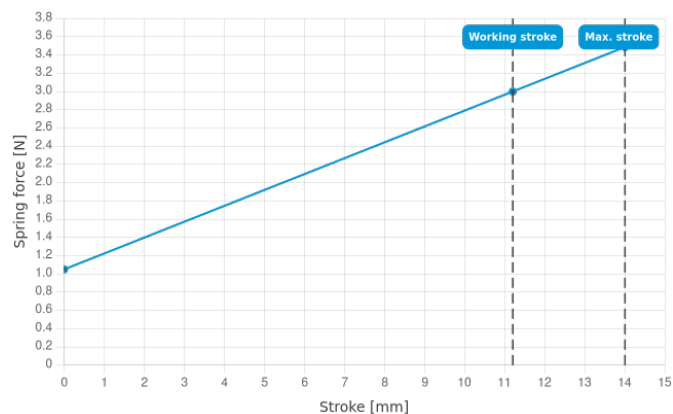

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

