

ESD discharge probe

FB-ALS-VA207x-2S

Item 22112



GO TO PRODUCT



ingun[®]

Partner for Future Technology

- Reliable dissipation of electrostatic discharges that occur as a result of potential differences
- Quick, easy installation

Application

The ESD discharge contact is used for the reliable discharge of any electrostatic discharges that may occur as a result of potential differences. It is installed in the probe plate and the moving plate.

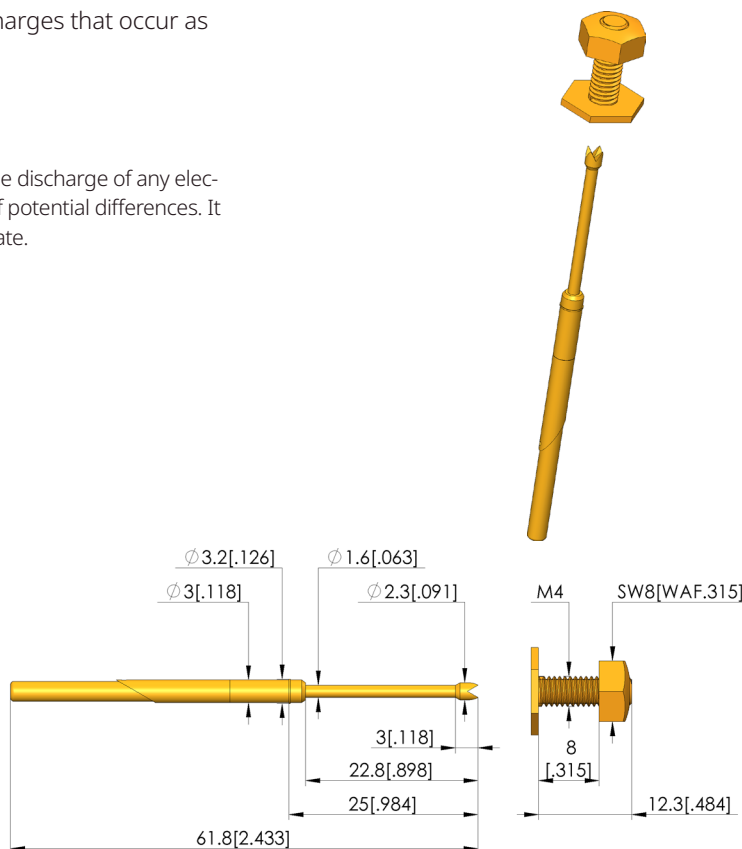

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Component assembly:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Functional units

FB-VAxxxx

ESD discharge contact

Dual-stage contacting

Customising accessories

Unassembled

GKS-114-0011

0.01 kg [0.022 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Vacuum test fixtures (VA):

Interchangeable kits (WS):

VA 3070-2e

Technical data

Stroke:

Length:

Diameter:

16 mm [0.629 in]

61.8 mm [2.43 in]

3 mm [0.118 in]

ESD discharge probe


FB-ALS-VA207x-2S

Item 22112



ingun[®]

Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test fixture kits

