






GO TO PRODUCT

INGUN SELECTION



1:1

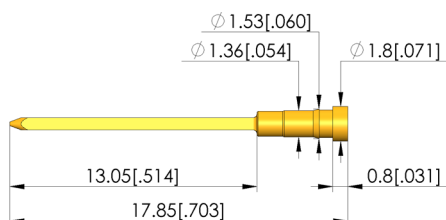

General data

Product group:
Series:
Sub-series:
Grid:
Type of contact terminal connection:
Installation height:
Installation type:
Quick-exchange system:
Surface area:
Material:
Knurl:
RoHS-compliant:

Contact terminals (KT)
KT-158
KT-158
2.54 mm [100 mil]
Wire-wrap
0.8 mm [.031 in]
Press-in
No
A gold
1 brass
No
Yes

Tip style data

Tip style:
Tip diameter:
Bore ϕ in tip style:

43 inverse cone with chamfered bore
1.8 mm [.07 in]
1.1 mm [.043 in]

Mechanical data

Collar height:
Total length:
Shaft diameter:
Latching lug:

01
17.8 mm [.7 in]
1.35 mm [.053 in]
Yes

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:

1.44 – 1.46 mm [.056 – .057 in]
1.44 – 1.46 mm [.056 – .057 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test probes

