



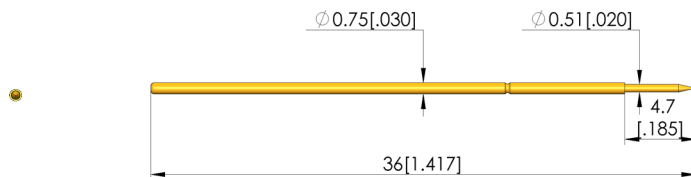

GO TO PRODUCT

- Inner conductor for RF test probes (HFS)
- Can be used for service or repair

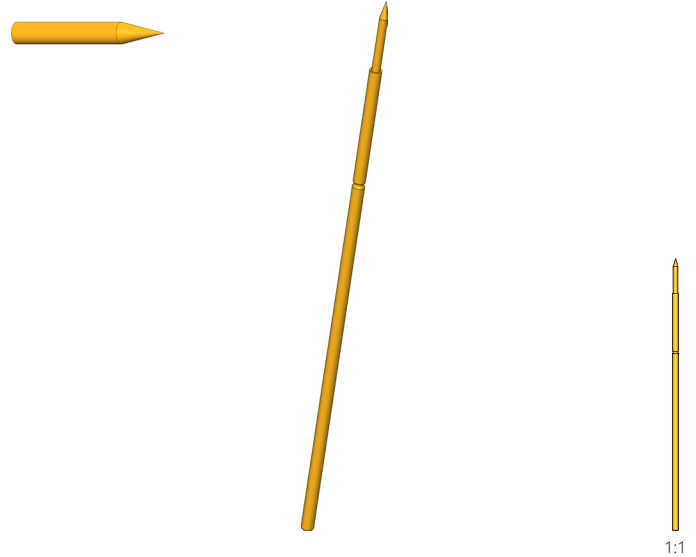

General data

| | |
|---------------------------------|-------------------------|
| Product group: | Accessories (GKS / ADA) |
| Sub-product group: | RF inner conductor |
| Series: | GKS-051 |
| Grid: | 1.27 mm [50 mil] |
| Contacting from: | Via |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Min. temperature: | -40 °C [-40 °F] |
| Max. temperature: | 80 °C [176 °F] |
| RoHS-compliant: | Yes |

Tip style data

| | |
|---------------------|--------------------------------------|
| Tip style: | 07 90° 3-edged chisel, self-cleaning |
| Tip diameter: | 1 mm [.039 in] |
| Tip style surface: | A gold |
| Tip style material: | 3 CuBe |

Electrical data

| | |
|--|---------|
| Current load capacity / rated current: | 2 A |
| Typical resistance (RI): | 20 mOhm |

Mechanical data

| | |
|---------------------------------|-------------------|
| Total length: | 36 mm [1.41 in] |
| Barrel diameter: | 0.75 mm [.029 in] |
| Maximum stroke: | 3.7 mm [.145 in] |
| Spring pre-load: | 0.7 N [2.51 ozf] |
| Collar height: | 00 |
| Spring force at working stroke: | 1.3 N [4.67 ozf] |
| Recommended working stroke: | 2 mm [.078 in] |

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test probes

