

Test Probe

GKS-051 303 090 A 1300

Item GKS-051-0017





GO TO PRODUCT

ingun®

Partner for Future Technology

- Inner conductor for RF test probes (HFS)
- Can be used for service or repair

INGUN SELECTION

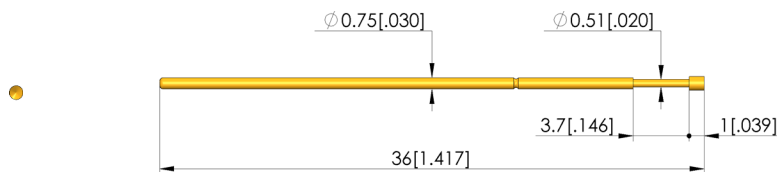

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Min. temperature:
Max. temperature:
RoHS-compliant:

Accessories (GKS / ADA)
RF inner conductor
GKS-051
1.27 mm [50 mil]
Post
Yes
Plug-in
Yes
No
No
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

03 inverse cone
0.9 mm [.035 in]
A gold
3 CuBe

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

2 A
20 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

36 mm [1.41 in]
0.75 mm [.029 in]
3.7 mm [.145 in]
0.7 N [2.51 ozf]
00
1.3 N [4.67 ozf]
2 mm [.078 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes



ingun.com