




- PLEXIGLAS® version with increased surface resistance
- Available for all common ESD exchangeable kits
- Standard thickness of 15 mm

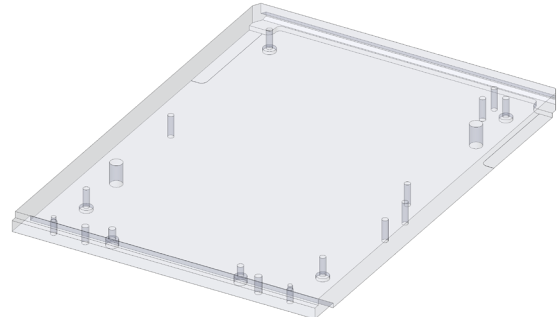

### General data

|                   |                                       |
|-------------------|---------------------------------------|
| Product group:    | Pressure frame plates                 |
| Series:           | NHP ATSMAXx                           |
| Type:             | Coated surface                        |
| Version:          | 10 <sup>4</sup> - 10 <sup>8</sup> Ohm |
| Accessory type:   | Customising accessories               |
| Material:         | PMMA AS                               |
| Width:            | 210 mm [8.26 in]                      |
| Height:           | 15 mm [.59 in]                        |
| Weight:           | 1.1 kg [2.42 lbs]                     |
| Min. temperature: | 10 °C [50 °F]                         |
| Max. temperature: | 60 °C [140 °F]                        |
| RoHS-compliant:   | Yes                                   |

### Compatible with

|                                |              |
|--------------------------------|--------------|
| Exchangeable kits version:     | No RF        |
| MA exchangeable kits (ATS MA): | ATS MA11/S-5 |

### Technical data

|                           |                                          |
|---------------------------|------------------------------------------|
| Length:                   | 297 mm [11.6 in]                         |
| Outer dimensionS (WxDxH): | 210 x 297 x 15 mm [8.26 x 11.6 x .59 in] |

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com

