

Test Probe

GKS-075 214 064 A 2000 LH

Item GKS-075-0770




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Well-established test probes for contacting PCBs
- For optimal contact to the test points (e.g. pads, vias, and pins), various tip styles with various diameters and finishes are available.
- Various spring forces available as well as versions with stainless steel springs suitable for high temperatures
- Used for setting the optimum stroke conditions in the test fixture, various installation heights can be achieved by combining test probes and receptacles

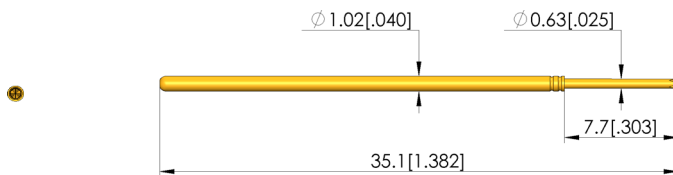

General data

| | |
|---------------------------------|--|
| Product group: | ICT / FCT (in-circuit test and function test |
| Sub-product group: | Standard stroke test probe |
| Series: | GKS-075 |
| Grid: | 1.91 mm [75.1 mil] |
| Contacting from: | Pad |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Compatible receptacle(s): | KS-075 |
| Min. temperature: | -40 °C [-40 °F] |
| Max. temperature: | 80 °C [176 °F] |
| RoHS-compliant: | Yes |

Tip style data

| | |
|---------------------|---------------------------------|
| Tip style: | 14 4-point crown, self-cleaning |
| Tip diameter: | 0.64 mm [.025 in] |
| Tip style surface: | A gold |
| Tip style material: | 2 steel |

Electrical data

| | |
|--|---------|
| Current load capacity / rated current: | 3 A |
| Typical resistance (Ri): | 20 mOhm |

Mechanical data

| | |
|---------------------------------|-------------------|
| Total length: | 35.1 mm [1.38 in] |
| Barrel diameter: | 1.02 mm [.04 in] |
| Maximum stroke: | 6.35 mm [.25 in] |
| Spring pre-load: | 0.79 N [2.84 ozf] |
| Collar height: | 00 |
| Spring force at working stroke: | 2 N [7.19 ozf] |
| Recommended working stroke: | 4.3 mm [.169 in] |

Test Probe


GKS-075 214 064 A 2000 LH

Item GKS-075-0770



ingun[®]

Partner for Future Technology

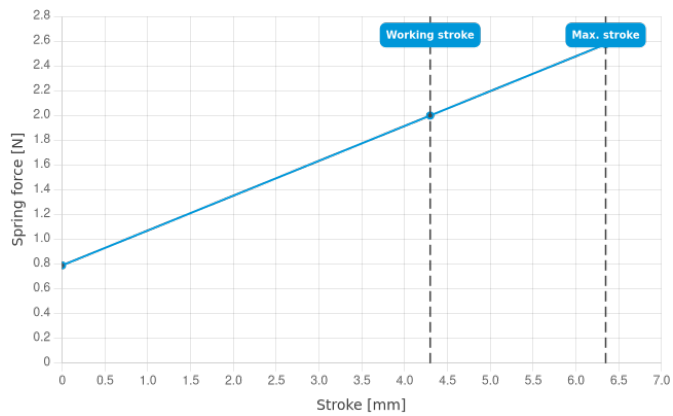

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ingun.com