High-current test probe

HSS-100 305 150 S 2000

Item HSS-100-0005







- Trusted, robust high-current probes, optimally sized for current load capacity ratio
- Low-Ohm probe with Ri typical: < 10 mOhm
- For use in function and burn-in tests
- Large selection of tip styles and spring forces for optimum contact with DUT
- Optimum adjustment of the stroke ratios in the test fixture: The test probe collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights









General data

Product group: International standard HSS Sub-product group: International standard HSS HSS-100 Series: Grid: 2.54 mm [100 mil] Pad Contacting from: Magnetic: Yes Plug-in Installation type: Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No Compatible receptacle(s): KS-100 Min. temperature: -100 °C [-148 °F] Max. temperature: 200 °C [392 °F] RoHS-compliant: Yes

Tip style data

Tip style:	05 bullet-nosed (full radius)
Tip diameter:	1.5 mm [.059 in]
Tip style surface:	S silver
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current: 16 A
Typical resistance (Ri): 10 mOhm

Mechanical data

rotariength:	33.4 [[[[1.31 [[]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	6.35 mm [.25 in]
Spring pre-load:	0.61 N [2.19 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	4.3 mm [.169 in]


HIGH-CURRENT TEST PROBES

High-current test probe HSS-100 305 150 S 2000

Item HSS-100-0005





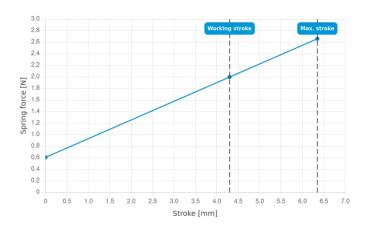

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about High-current test probes

