






GO TO PRODUCT

Prüfung von Kabelschuhen

zur Überprüfung von Steckverbindern mit geometrisch eindeutig ausgerichteten Kontaktterminals



1:1

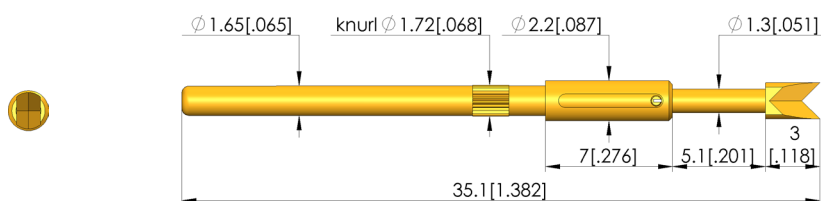

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Min. temperature:
Max. temperature:
RoHS-compliant:

Screw-in test probe
Non-rotating test probes
GKS-710
2.54 mm [100 mil]
Flat contact
Yes
Plug-in
No
No
Yes
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:
Spade width:
Spade length:

21 spade with 2 points, self-cleaning
2 mm [.078 in]
A gold
2 steel
1.3 mm [.051 in]
3 mm [.118 in]

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

5 A
30 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

35.1 mm [1.38 in]
1.65 mm [.064 in]
5 mm [.196 in]
1.06 N [3.81 ozf]
07
3 N [10.7 ozf]
4 mm [.157 in]

Test Probe


GKS-710 221 130 A 3007

Item GKS-710-0013



ingun[®]

Partner for Future Technology

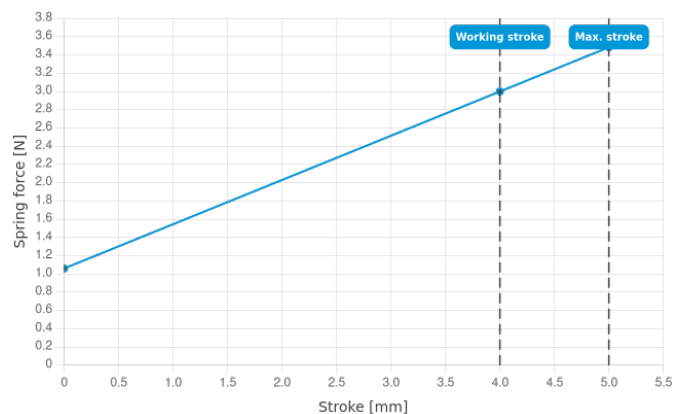

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com