

# Receptacle KS-003 30 G

Item KS-00330G




GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

## INGUN SELECTION

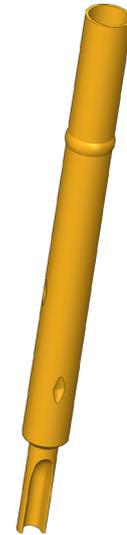

1:1

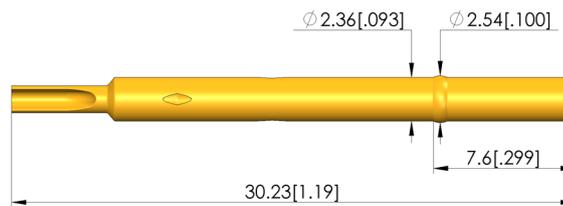

### General data

Product group:  
Series:  
Sub-series:  
Type of receptacle connection:  
Press ring:  
Surface area:  
Collar diameter:  
Collar height:  
Knurl:  
Vacuum-tight:  
RoHS-compliant:

Receptacles (KS)  
KS-003  
KS-003 press-in version  
Solder  
Yes  
Gold  
2.49 mm [.098 in]  
7.6 mm [.299 in]  
No  
No  
Yes

### Mechanical data

Total length: 30.2 mm [1.18 in]  
Outer diameter: 2.36 mm [.092 in]

### Mounting hole

Mounting hole in CEM1: 2.33 – 2.34 mm [.091 – .092 in]  
Mounting hole in FR4: 2.33 – 2.34 mm [.091 – .092 in]  
Mounting hole with press ring in CEM1: 2.39 – 2.44 mm [.094 – .096 in]  
Mounting hole with press ring in FR4: 2.39 – 2.44 mm [.094 – .096 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/26\_GB

Learn more about  
Test probes



ingun.com