

Pre-centering pin VZ-R-12-22-K-ESD

Item 23056



GO TO PRODUCT

ingun[®]




Partner for Future Technology

- Trusted pre-centring for positioning the PCB on the probe field
- HFS-802 H-MTD Kontaktstifte

Application

Pre-centring pins (VZ) are mounted onto the moving plate, and are used as insertion aids to pre-position DUTs simply and quickly on the probe field.

INGUN SELECTION

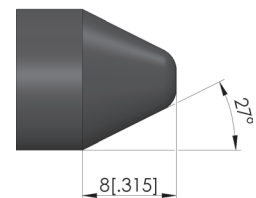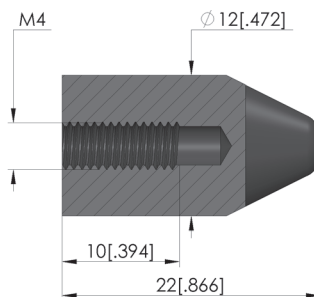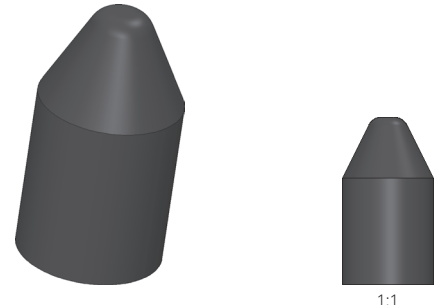

General data

Product group:
Series:
Type:
Version:
Accessory type:
Material:
Colour:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Pre-centering pins
VZ
Pre-centring pin, round, centric
ESD
Customising accessories
PE
Black
0.01 kg [.022 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Exchangeable kits version:
Manual test fixtures (MA):
Vacuum test fixtures (VA):
MA exchangeable kits (ATS MA):
VA exchangeable kits (ATS VA):
PA exchangeable kits (ATS PA):
Interchangeable kits (WS):
For dual-stage contacting:

No limitations
MA 2012
VA xxxx
ATS MAxx
ATS VINxxx
ATS PAZxxx
WS
Yes

Technical data

Installation:
Length:
Diameter:

Thread M4
22 mm [.866 in]
12 mm [.472 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB