




- PLEXIGLAS® version with increased surface resistance
- Available for all common ESD exchangeable kits
- Standard thickness of 15 mm

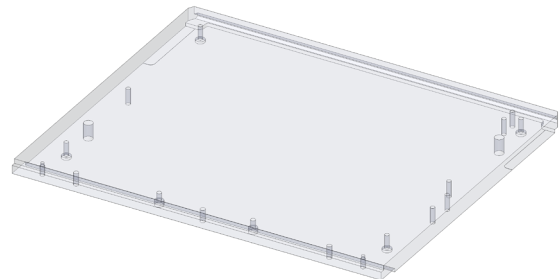

General data

Product group:

Series:

Type:

Version:

Accessory type:

Material:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Pressure frame plates

NHP ATSMAxx

Coated surface

$10^4 - 10^8$ Ohm

Customising accessories

PMMA AS

350 mm [13.7 in]

15 mm [.59 in]

1.8 kg [3.96 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Exchangeable kits version:

MA exchangeable kits (ATS MA):

No RF

ATS MA12/S-7

Technical data

Length:

297 mm [11.6 in]

Outer dimensionS (WxDxH):

350 x 297 x 15 mm [13.7 x 11.6 x .59 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com

