

Interface support

SSA-GR228x-15-VA4060

Item 113518



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Interface support für TERADYNE GR228x-15/xx (LH, 12X) interface
- Ideally designed for VA 4060 test fixtures
- Quick, easy installation on the bottom of the test fixture
- Reliable connection from test fixture to system interface

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

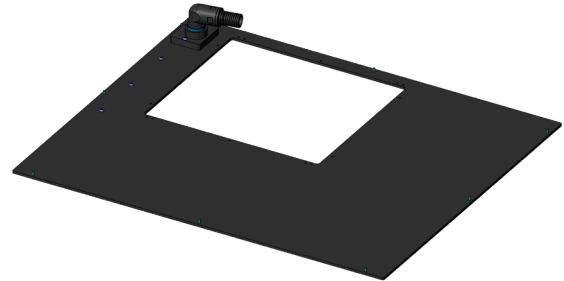

General data

Product group:	Housing
Series:	SSA-VAxxxx
Type:	GR228x-15 (Teradyne)
Version:	VA 4060
Accessory type:	Additional function
Scope of delivery:	Unassembled
Width:	538 mm [21.1 in]
Height:	96.5 mm [3.79 in]
Weight:	1.2 kg [2.64 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):	VA 4060
Accessories:	SST-GR228x-15/07

Technical data

Length:	646 mm [25.4 in]
Outer dimensionS (WxDxH):	646 x 538 x 96.5 mm [25.4 x 21.1 x 3.79 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test fixture kits

