






## Positionstest

Zur Überprüfung der korrekten Position des Kontaktterminals im Steckergehäuse



1:1

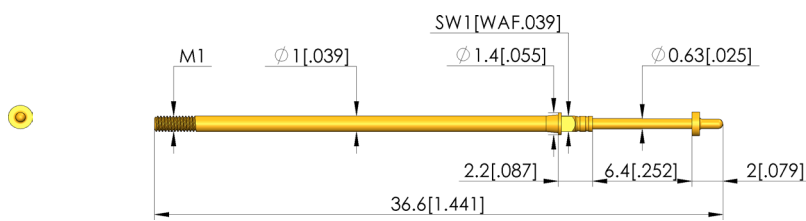

### General data

Screw-in torque max.:  
Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Screw-in torque:  
Compatible receptacle(s):  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

1 cNm [.088 lbf-in]  
Step probes  
Step probes  
T-075  
1.91 mm [75.1 mil]  
Pad  
Yes  
Screw-in  
Yes  
No  
No  
.5 – 1 cNm [.044 – .088 lbf-in]  
KS-075 M  
-40 °C [-40 °F]  
80 °C [176 °F]  
Yes

### Tip style data

Tip style:  
Tip diameter:  
Tip style surface:  
Tip style material:  
Step probe tip height:  
Disk diameter:

05 bullet-nosed (full radius)  
0.6 mm [.023 in]  
A gold  
3 CuBe  
1.5 mm [.059 in]  
1.5 mm [.059 in]

### Electrical data

Current load capacity / rated current:  
Typical resistance (Ri):

3 A  
20 mOhm

### Mechanical data

Total length:  
Barrel diameter:  
Maximum stroke:  
Spring pre-load:  
Collar height:  
Spring force at working stroke:  
Recommended working stroke:

36.6 mm [1.44 in]  
1 mm [.039 in]  
6.35 mm [.25 in]  
0.6 N [2.15 ozf]  
02  
1.5 N [5.39 ozf]  
4.3 mm [.169 in]

# Test Probe

## T-075 305 060 150 150A1502M

Item T-075-0042



**ingun**<sup>®</sup>

Partner for Future Technology



### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
Screw-in test probe



[ingun.com](https://www.ingun.com)

SCREW-IN TEST PROBE