

Interchangeable kit WS KEYSIGHT/i3070-5i

Item 48136-KIT




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Trusted interchangeable kits for Keysight inline test systems
- Precise, reliable contacting with peRfectly configured guides
- Modular design with bottom interchangeable kit (WSU) and top interchangeable kit (WSO)
- Robust, durable design with outstanding service life

INGUN SELECTION

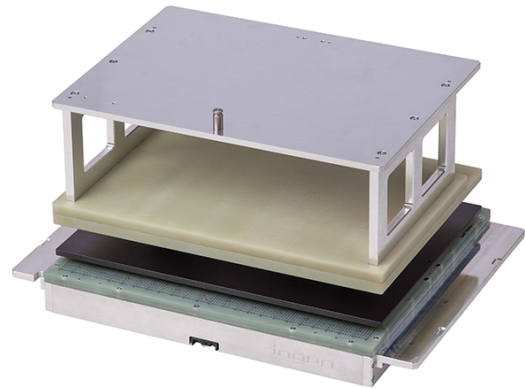

General data

Product group:	Inline interchangeable kit (WS)
Subseries:	
Series:	
Version:	
Scope of delivery:	With interface
Max. interface signals:	Unassembled 3.666
Interface blocks required:	No
Dual-stage contacting:	Yes
Double-sided contact:	Yes
Weight:	18 kg [39.6 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
Low voltage:	No
RoHS-compliant:	Yes

Compatible with

Test systems:

Technical data

Pushrod length:	20 mm [.787 in]
Test probe installation height, top:	16 mm [.629 in]
Test probe installation height, bottom:	16 mm [.629 in]
Test probe installation height, dual-stage, bottom:	21.5 mm [.846 in]
Free space above PCB:	11 mm [.433 in]
Useable area (WxD):	405 x 341 mm [15.9 x 13.4 in]
Outer dimensionS (WxDxH):	566 x 403 x 278 mm [22.2 x 15.8 x 10.9 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Inline interchangeable kit



INLINE INTERCHANGEABLE KITS

ingun.com