

Gas pressure spring

GDF-220-50-050N-A6-A6

Item 25695



GO TO PRODUCT



ingun[®]

Partner for Future Technology

- Trusted gas springs from the market leader
- Store with the piston rod facing downwards

Note:

The gas springs must be stored with the piston rod pointing downwards so that the seal remains moistened from the inside. It makes no difference whether the piston of the gas spring is extended (unloaded) or retracted (loaded).

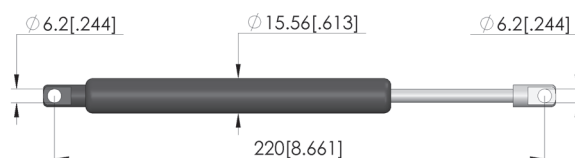

General data

Product group:

Series:

Type:

Version:

Accessory type:

Min. temperature:

Max. temperature:

RoHS-compliant:

Gas springs

GDF

Gas spring

Standard, attenuated

Spare parts

10 °C [50 °F]

60 °C [140 °F]

Yes

Technical data

Stroke:

Force:

Length:

Gas pressure spring length, home position:

Plunger length, home position:

Installation 1 diameter:

Installation 2 diameter:

50 mm [1.96 in]

50 N [179 ozf]

220 mm [8.66 in]

170 mm [6.69 in]

50 mm [1.96 in]

6.2 mm [0.244 in]

6.2 mm [0.244 in]

Gas pressure spring **GDF-220-50-050N-A6-A6**

Item 25695



ingun[®]

Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB