

Test Probe

VF25-229 258 A 100


Item VF25-0019



GO TO PRODUCT

ingun[®]

Partner for Future Technology

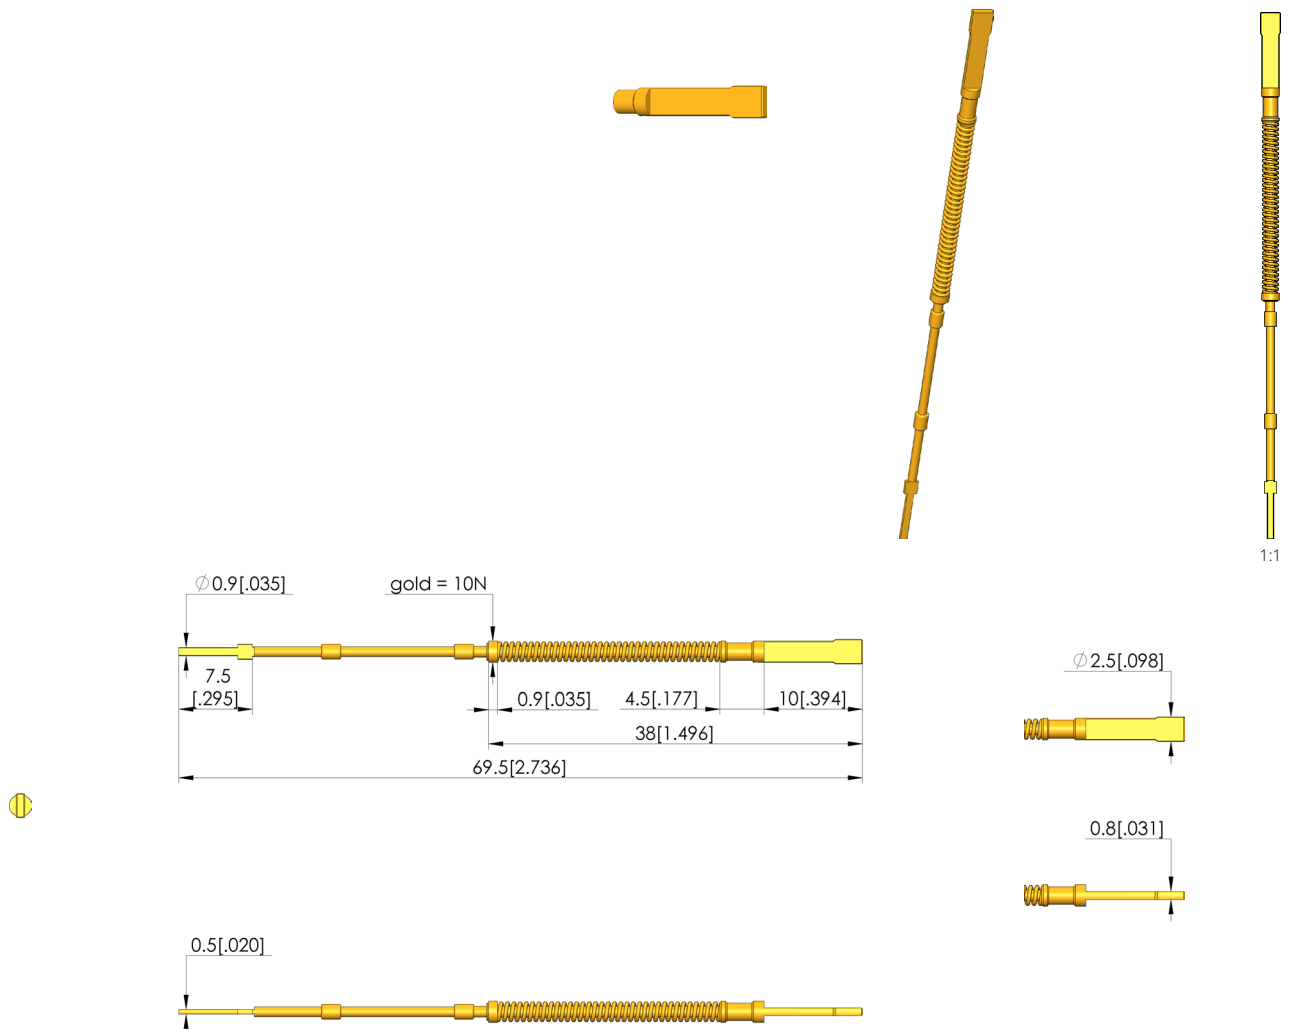

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Continuous plunger:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Push-back probes
Push-back probes
VF25
3 mm [118 mil]
Female connector
Yes
Bayonet
Yes
No
Yes
ø0,9 x 0,5 x 7,5
KS-VF25
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:
Spade width:
Spade length:

29 spade, flat with flat head
2.5 mm [.098 in]
A gold
2 steel
0.8 mm [.031 in]
10 mm [.393 in]

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

5 A
50 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Spring force at working stroke:
Recommended working stroke:

69.5 mm [2.73 in]
2 mm [.078 in]
6 mm [.236 in]
3.33 N [11.9 ozf]
10 N [35.9 ozf]
5 mm [.196 in]

SCREW-IN TEST PROBE

Test Probe


VF25-229 258 A 100

Item VF25-0019



ingun[®]

Partner for Future Technology

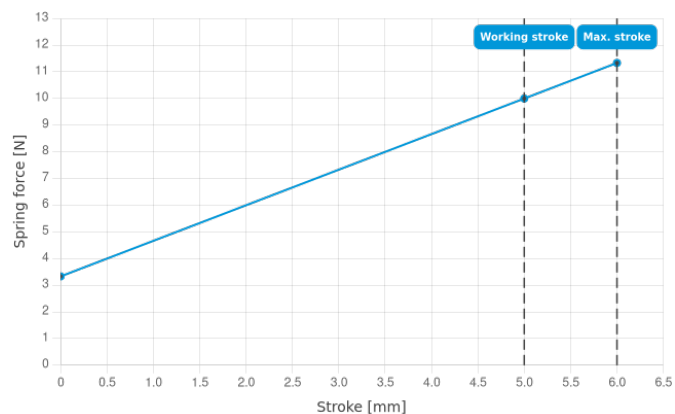

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com