

Test Probe

GKS-051 308 080 A 2000

Item GKS-051-0009





GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Inner conductor for RF test probes (HFS)
- Can be used for service or repair

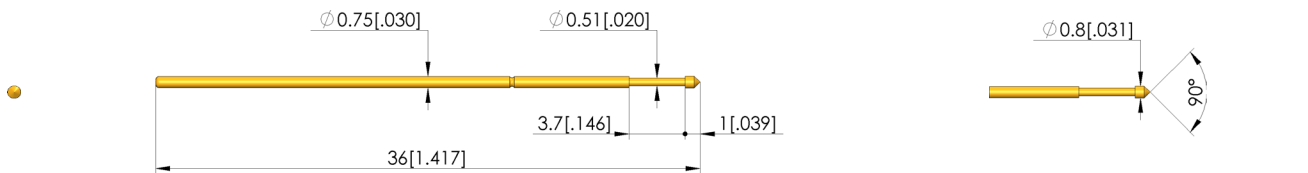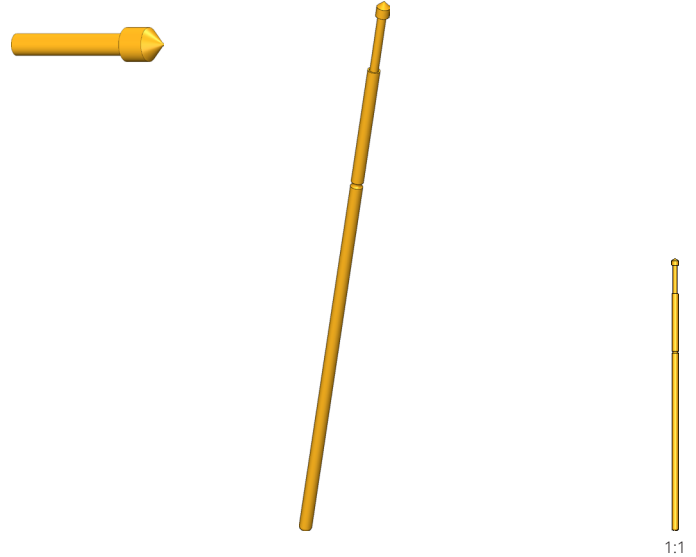

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	RF inner conductor
Series:	GKS-051
Grid:	1.27 mm [50 mil]
Contacting from:	Via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	08 90°conical, self-cleaning
Tip diameter:	0.8 mm [.031 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	20 mOhm

Mechanical data

Total length:	36 mm [1.41 in]
Barrel diameter:	0.75 mm [.029 in]
Maximum stroke:	3.7 mm [.145 in]
Spring pre-load:	1.07 N [3.84 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	2 mm [.078 in]

Test Probe


GKS-051 308 080 A 2000

Item GKS-051-0009



ingun®

Partner for Future Technology

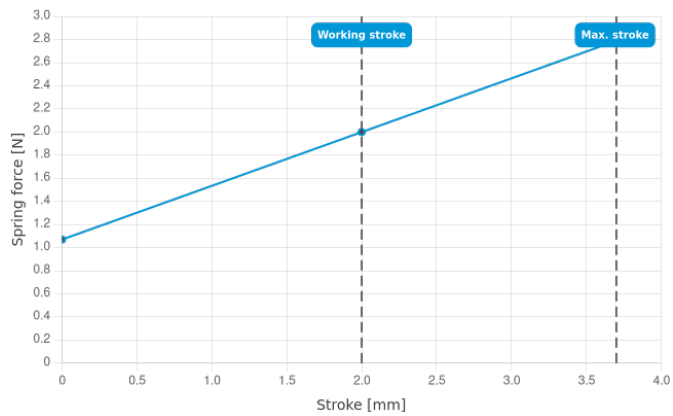

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes

