






- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture:
The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Version with central beading ensure low wobble for contacting small test points
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



1:1

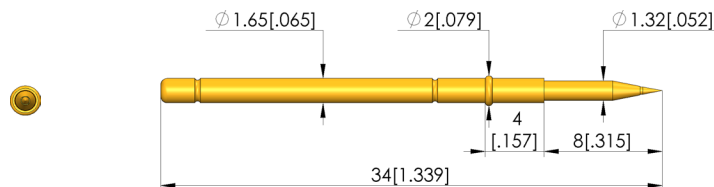

General data

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Metric standard
 Series: GKS-912
 Grid: 2.54 mm [100 mil]
 Contacting from: Pad
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-112
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)
 Metric standard
 GKS-912
 2.54 mm [100 mil]
 Pad
 Yes
 Plug-in
 Yes
 No
 No
 KS-112
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

15 22° high-carbon tip, self-cleaning
 1.3 mm [.051 in]
 A gold
 2 steel

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

5 A
 20 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

34 mm [1.33 in]
 1.66 mm [.065 in]
 5 mm [.196 in]
 0.93 N [3.34 ozf]
 04
 3 N [10.7 ozf]
 4 mm [.157 in]

Test Probe


GKS-912 215 130 A 3004

Item GKS-912-1236



ingun[®]

Partner for Future Technology

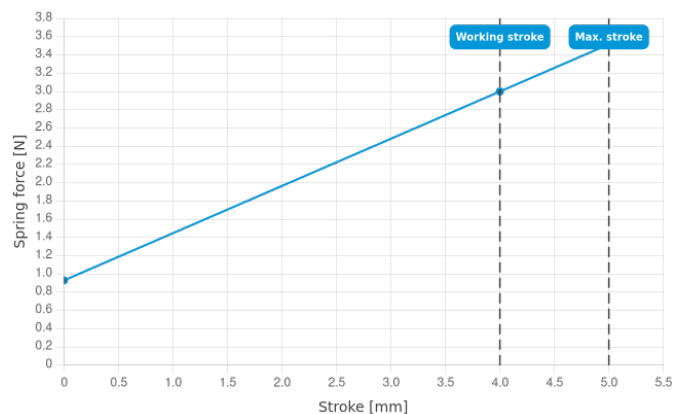

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
ICT/FCT Test probes



ingun.com

ICT/FCT TEST PROBES