

# Receptacle KS-002 47 G


Item KS-00247G




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology



1:1

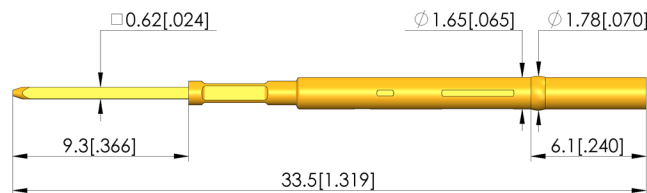

## General data

Product group:  
Series:  
Sub-series:  
Type of receptacle connection:  
Press ring:  
Surface area:  
Collar diameter:  
Collar height:  
Knurl:  
Vacuum-tight:  
RoHS-compliant:

Receptacles (KS)  
KS-002  
KS-002 press-in version  
Wire-wrap  
Yes  
Gold  
1.78 mm [0.07 in]  
6.1 mm [0.24 in]  
No  
No  
Yes

## Mechanical data

Total length: 33.5 mm [1.31 in]  
Outer diameter: 1.67 mm [0.065 in]

## Mounting hole

Mounting hole in CEM1: 1.68 – 1.69 mm [0.066 – 0.066 in]  
Mounting hole in FR4: 1.68 – 1.69 mm [0.066 – 0.066 in]  
Mounting hole with press ring in CEM1: 1.7 – 1.75 mm [0.066 – 0.068 in]  
Mounting hole with press ring in FR4: 1.7 – 1.75 mm [0.066 – 0.068 in]

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB

Learn more about  
Test probes

