

Interface block

SB-T-VA-001-PG16-ALU

Item 22470



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Equipped with PG16 quick-release fitting
- Suitable for use in all test fixtures with Pylon interface
- Reliable transfer of vacuum within the scope of the specification


Application

Interface blocks (SB) are used to reliably transmit signals between test device and test system in internal and external Pylon interfaces. Vacuum blocks are suitable for the reliable transmission of vacuum within the scope of its specification. They are primarily used with vacuum test fixtures with a Pylon interface.



Delivery

Delivery includes PG16 quick-release fitting, including installation accessories.

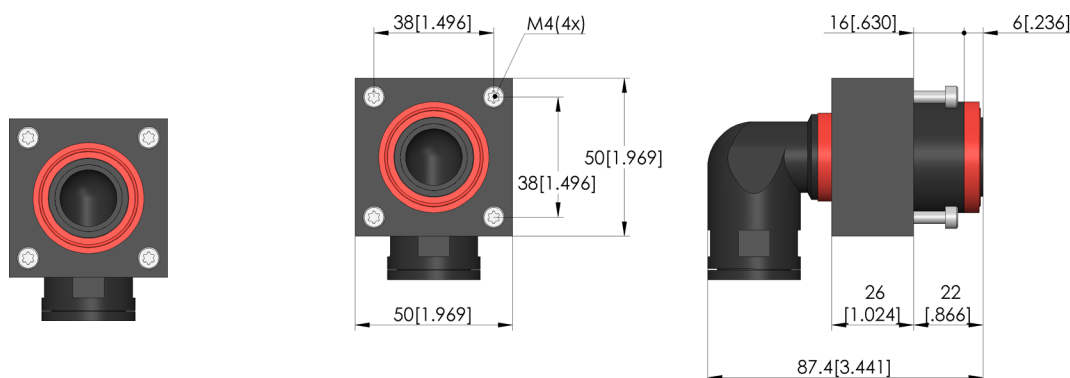

General data

Product group:

Series:

Type:

Version:

Accessory type:

Component assembly:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Interface blocks (SB)

SB-VA

Test system side

Customising accessories

RQW (PG 16)

0.097 kg [0.213 lbs]

-10 °C [14 °F]

60 °C [140 °F]

Yes

Compatible with

Compatible mating part 1:

Manual test fixtures (MA):

Pylon receiver:

SB-P-VA-001-PG16

MA 21xx

RC-PYLON-12-V2

Technical data

Working distance:

Connection:

Sealing:

Number of poles:

15,1 +/- 0,5 mm

Vacuum tube PG16

Silicone

1 (fixed position)

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB