

Connector cable

ASK-BL12-F-G-0700-AWG26-RT

Item 116062



GO TO PRODUCT




ingun[®]

Partner for Future Technology

- Connection cable for signal interface blocks (SB-T/P-SI-216)
- Low-wear connection that can be quickly plugged and unplugged without tools
- Consistently stable signal quality throughout
- Flexible stranded wires for the greatest possible freedom of movement
- Crimp connection with contact blade which ensures secure clamping with high retention force

Application

The connection cable is used for the low-wear, tool-free, quick connection and disconnection of the test side / DUT side 216-pole signal interface blocks as an alternative connection technology to the classic wire-wrap connection.

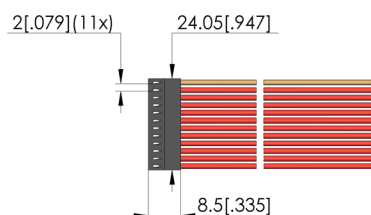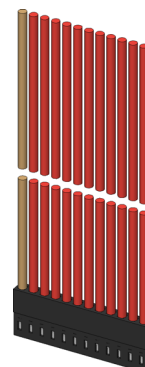

General data

Product group:	Electric accessory
Series:	ASK
Type:	Stranded cable
Version:	Connector housing, single row
Accessory type:	Customising accessories
Scope of delivery:	Pre-wired
Component assembly:	
Material:	Copper stranded wire, zinc plated
Colour:	Red, pin 1 brown
Min. temperature:	-20 °C [-4 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Electrical data



Typical resistance (Ri) of one GKS:	85 mOhm
-------------------------------------	---------

Compatible with

Interface blocks (SB):	SB-T-SI-216
Interface blocks (SB) 2:	SB-P-SI-216

Technical data

Connection:	Plug / solder / crimp connection
Force:	20 N [71.9 ozf]
Max. current:	3.6 A
Installation:	Plug connector
Max. voltage:	250 V
Number of poles:	12
Installation grid:	2 mm [0.078 in]
Diameter:	AWG26 mm
Cable length:	700 mm [27.5 in]

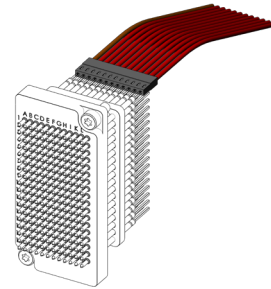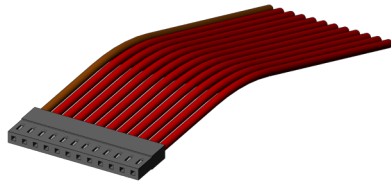**Accessories**

Part no.	Designation	Version	Assembly
Signal interface blocks for test system side SB-T-SI			
116076	SB-T-SI-216-4A	Square post	216 Slots with KS-945 47 and GKS-945 357 106 A 1100
Signal interface blocks for DUT side SB-P-SI			
116075	SB-P-SI-216-4A-0,6	Square post	216 Slots with KT-158 06

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

